

DESIGN FOR ALL 4CS



SANITARY | ACCESSORIES AND ACCESSIBILITY



THE **DESIGN FOR ALL** BATHROOM ACCESSORIES PROGRAM DEMONSTRATES HOW ELEGANT, WELL-COORDINATED DESIGN CAN ELEVATE THE APPEARANCE AND PERFORMANCE OF ACCESSIBLE SPACES. SMARTLY DETAILED AND EXCEPTIONALLY WELL CRAFTED, EACH PRODUCT PROMOTES A LIFE WITHOUT BARRIERS AND SUPPORTS INCLUSION BEAUTIFULLY. PBA COLLABORATED WITH GENSLER, SERVING AS PRODUCT MERCHANDISING CONSULTANT, ON THE COMPLETE RANGE, WHICH IS SUITABLE FOR OFFICE, HOSPITALITY, RETAIL, HEALTHCARE, AND EDUCATION ENVIRONEMENTS.

DESIGN FOR ALL 4CS





PBA ANTI-MICROBIAL COATING

AMC

PRODUCTS IN STAINLESS
STEEL HAVE NATURAL
ANTIBACTERIAL PROPERTIES
AND A GOOD HANDLE
ON CLEANLINESS.

PBA ANTI-MICROBIAL
COATING (AMC) IS AN
INNOVATIVE FINISHING
HIGHLY RECOMMENDED FOR
ALL SITUATIONS WHERE
HYGIENE IS EXTREMELY
IMPORTANT NOT ONLY
FOR THE DESTINATION,
BUT ALSO FOR THE HIGH
ATTENDANCE LIKE HOSPITALS
AND GENERALLY PUBLIC
SPACES.


AMC IS AVAILABLE FOR ALL THE STAINLESS STEEL BATHROOM ACCESSORIES ON REQUEST.





AMC



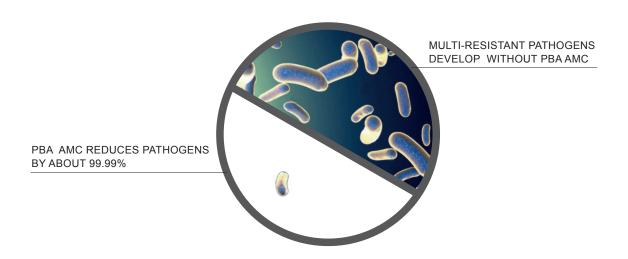

TRIED AND TESTED EFFICACY

REDUCES MULTI-RESISTANT PATHOGENS BY 99.99%. (EFFECT OF ANTI-BACTERIAL ACTIVITY ON STAINLESS STEEL SURFACES).



PBA ANTI-MICROBIAL COATING



THE **PBA ANTI-MICROBIAL COATING (AMC)** SURFACE FINISHING CONTAINS SPECIAL ADDITIVES THAT MAKE THE SURFACE PROTECTED FROM BACTERIA AND MICROORGANISMS. THE TESTS SHOW THAT ON UNTREATED SURFACES THE MICROBES AND BACTERIA CAN EASILY PROLIFERATE WHILE ON THE TREATED SURFACES THE BACTERIAL PROLIFERATION IS PRACTICALLY ZEROED.

TEST AND EFFICACY

THE FOUNDATION FOR SUCCESSFULLY FIGHTING GERM GROWTH CONSISTS OF A THREE ACTION MECHANISMS: BLOCKAGE OF PRIMARY CELL METABOLISM, STOPPAGE OF CELLULAR RESPIRATION, PREVENTION OF CELL DIVISION.

SURFACES WITH **PBA ANTI-MICROBIAL COATING (AMC)** HAVE BEEN TESTED TO BE ACTIVE AGAINST GRAM-POSITIVE (STAPHYLOCOCCUS AUREUS - MRSA, BACILLUS SUBTILIS, STREPTOCOCCUS DAECALIS, AND OTHERS) AND GRAM-NEGATIVE BACTERIA (ESCHERICHIA COLI - ESBL, LEGIONELLA PNEUMOPHILA, PSEUDOMONAS AERUGINOSA AND OTHERS).

WHERE TO USE

WE RECOMMEND PBA ANTI-MICROBIAL COATING (AMC) FOR ALL THE HYGENE-SENSITIVE AREAS SUCH AS HOSPITALS AND RETIREMENT HOME AND GENERALLY FOR PUBLIC BUILDINGS AND HOTELS.

CARE AND MAINTENANCE

PBA ANTI-MICROBIAL COATING (AMC) NEEDS THE SAME CARE OF STANDARD POWDER-COATED SURFACES. SEE PBA CATALOGUE TECHNICAL SECTION FOR MORE INFORMATION.

AMC FINISH

STAINLESS	STEEL POWDER COA	ATED A M	С		
	TRANSPARENT SATIN		TRANSPARENT BRIGHT	BLACK RAL 9005	WHITE RAL 9010



DESIGN FOR ALL 4CS

THE **DESIGN FOR ALL 4CS** STAINLESS STEEL PROGRAM WAS DESIGNED FOR THE PROFESSIONAL CARE INDUSTRY. THANKS TO ITS FUNCTIONALITY, THE WIDE RANGE OF PRODUCTS, THE QUALITY OF THE BEST DEGREE OF STAINLESS STEEL (316L) AND THE TECHNICAL SOLUTION INTEGRATED IN THE PRODUCTS (FOR EASY INSTALLATION AND HIGH PERFORMANCE), THE STAINLESS STELL DESIGN FOR ALL RANGE IS THE OPTIMUM SOLUTION FOR DIFFERENT FIELDS: HEALTH CARE, HOSPITALS, PRIVATE CLINICS, OFFICES AND PUBLIC SPACES. THE ERGONOMIC DESIGN AND THE MODULAR STRUCTURE OF THE PROGRAM OFFER A HIGH LEVEL OF COMFORT AND EASE FOR ALL USERS.

FINISH



LRV 53 70

(LIGHT REFLECTANCE VALUE) MEASURES THE PERCENTAGE OF LIGHT A PAINT COLOR REFLECTS.

ADA



PRODUCTS IN THIS COLLECTION WERE DESIGNED TO COMPLY WITH THE ADA AND SIMILAR ACCESSIBILITY REQUIREMENTS, HOWEVER FINAL INTERPRETATION OF ACCESSIBILITY COMPLIANCE IS THE RESPONSIBILITY OF THE SPECIFIER AND SHOULD BE DETERMINED ACCORDING TO SPECIFIC PROJECT CONDITIONS AND LOCAL CODES.

CERTIFICATE

CITOTOXICITY TEST




Cytotoxicity test to DIN EN ISO 10993-5

CITOTOXICITY TEST











MATERIALS

Chemical compositions of AISI stainless steel grades

Material - Stainless	C%	Cr%	Ni%	Mo%
AISI 430 (1.4016)	0,12 max	14.0-18.0	1	1
AISI 304 (1.4301)	0,08 max	18.0-20.0	8.0-10.5	/
AISI 316 (1.4401)	0,08 max	16.0-18.0	10.0-14.0	2.00-3.00
AIS 316L (1.4404)*	0,03 max	16.0-18.0	10.0-14.0	2.00-3.00

*Standard PBA

Estimated pit corrosion penetration time - time to penetrate 1 mm (years) by steel type

Location - Stainless Steel	Marine	Semi_industrial	Rural
Stainless Steel AISI 430 (1.4016)	N/A	85	250
Stainless Steel AISI 304 (1.4301)	145	135	770
Stainless Steel AISI 316 (1.4401)	260	525	1200


Source: The British Stainless Steel Association (BSSA)


MATERIAL CERTIFICATION

THE AISI 316L STAINLESS STEEL (1) USED BY PBA, MEETS THE REQUIREMENTS OF UNI EN 1670, THE ULTIMATE QUALITY STANDARD FOR ENSURING RESISTANCE TO CORROSION. PBA HAS BEEN AWARDED A CERTIFICATE FOR SUCCESSFULLY SALT SPRAY TESTING THE STAINLESS STEEL IN ACCORDANCE WITH UNI ISO 9227.

(1) X2CrNiMo 17-12-2 as per EN 10088-3

MAINTENANCE

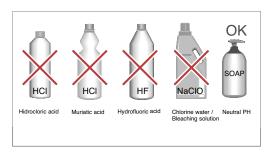

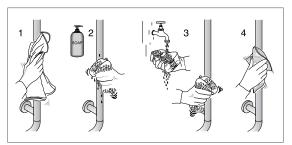


ONLY CLEAN WITH NEUTRAL PH SOAP



STRUCTURAL ELEMENTS SAFETY BARS & EQUIPMENT


STRAIGHT GRAB BARS MADE OF FULL LENGTH BENT TUBE FOR HIGH STRENGTH PERFORMANCE

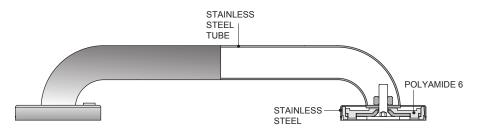




STAINLESS STEEL AND OTHERS MATERIALS ARE COMPLETELY SEPARABLE FOR RECYCLE.

OTHER GRAB BAR STYLES WITH CONNECTION PLUGS TO CREATE DIFFERENT CONFIGURATIONS

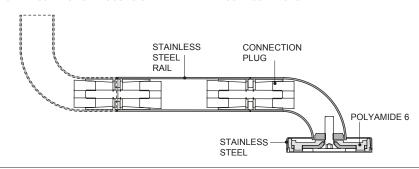


RAIL

RAIL IN AISI 316L STAINLESS STEEL, Ø 32 MM, 15/10 THICKNESS.




BEND 90°

BEND IN AISI 316L STAINLESS STEEL, Ø 32 MM, 15/10 THICKNESS, WITH THREADED INSERTS INSIDE. CONNECTION BETWEEN RAIL AND FIXING FLANGE.

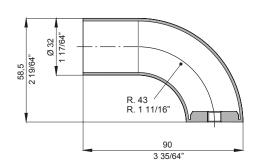


BEND 90°

BEND IN AISI 316L STAINLESS STEEL, Ø 32 MM, 15/10 THICKNESS. CONNECTION BETWEEN RAIL TO RAIL. Ø 32R. 1 11/16"R. 433 35/64"903 35/64"901 17/64"

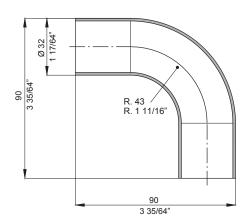


ROSE

FLANGE IN STEEL WITH POLYAMIDE 6 COVERING. SCREW-PLATE COVER IN AISI 316L STAINLESS STEEL.



STRAIGHT SUPPORT

SUPPORT IN AISI 316L STAINLESS STEEL.






PBA LINES - CONTRIBUTION MATRIX TO LEED V4

CHART OF PBA PRODUCTS CONTRIBUTION TO LEED V4

			INTEGRATIVE PROCESS
	IP I	PREREQUISITIE	INTEGRATIVE PROCESS PLANNING AND DESIGN
			MATERIALS AND RESOURCES
П	MP	DDEDEGUISITE	CONSTRUCTION AND DEMOLITION WASTE MANAGEMENT PLANNING
_		CREDIT	CONSTRUCTION AND DEMOLITION WASTE MANAGEMENT
ш	MR	CREDIT	BUILDING PRODUCT DISCLOSURE AND OPTIMIZATION - SOURCING OF RAW MATERIALS
			→ OPTION 2 LEADERSHIP EXTRACTION PRACTICES
	MR	CREDIT	BUILDING PRODUCT DISCLOSURE AND OPTIMIZATION - MATERIAL INGREDIENTS
			→ OPTION 2 MATERIAL INGREDIENT OPTIMIZATION
			INDOOR ENVIRONMENTAL QUALITY
			INDOOR ENVIRONMENTAL QUALITY
		CREDIT	LOW EMITTING MATERIALS
ш	EQ	CREDIT	CONSTRUCTION AIR QUALITY MANAGEMENT PLAN
			INNOVATION (Control of the control o
	IN	PILOT CREDIT	DESIGN FOR FLEXIBILITY
	IN	PILOT CREDIT	SOCIAL EQUITY
	IN	PILOT CREDIT	INCLUSIVE DESIGN
	IN	CREDIT	■ DESIGN FOR DECONSTRUCTION
			Mapping Your Green Products
			green map ***

22


GRAD BARS	PAGE	25
SHOWER SEATS	PAGE	39
SHOWER ACCESSORIES	PAGE	43
WASHROOM ACCESSORIES	PAGE	51
TOILET ACCESSORIES	PAGE	59
SPECIAL ACCESSORIES	PAGE	67
TECHNICAL INFORMATION	PAGE	79

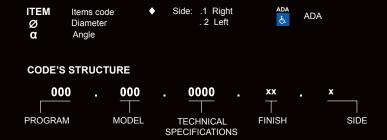

GRAB BARS		SHOWER SEATS	
	90° GRAB BARS page 30		FOLDING SHOWER SEAT
	HORIZONTAL GRAB BARS		FOLDING SHOWER SEAT
	TWO-WALL GRAB BARS		
	SWING UP GRAB BARS page 36		

SHOWER ACCESSORIES		WASHROOM ACCESSORIES	
<u> </u>	SHOWER CURTAIN RAILS		ADJUSTABLE MIRROR WITH FRAME AND CONTROL ROD FIXED MIRROR
	VERTICAL SHOWER HEAD HOLDER RAIL		TOWEL HOLDER
	page 50		page 54 PAPER TOWEL DISPENSER page 55
			STAINLESS STEEL PAPER BIN
		OTHER ACCESSORIES	page 57


TOILET ACCESSORIES		SPECIAL ACCESSORIES	
	HYGIENE BAG DISPENSER		WALL SHELF
	TOILET ROLL HOLDER		SHELVES
	TOILET BRUSH SET		CLOTH HOOKS
			PICTOGRAMS page 76

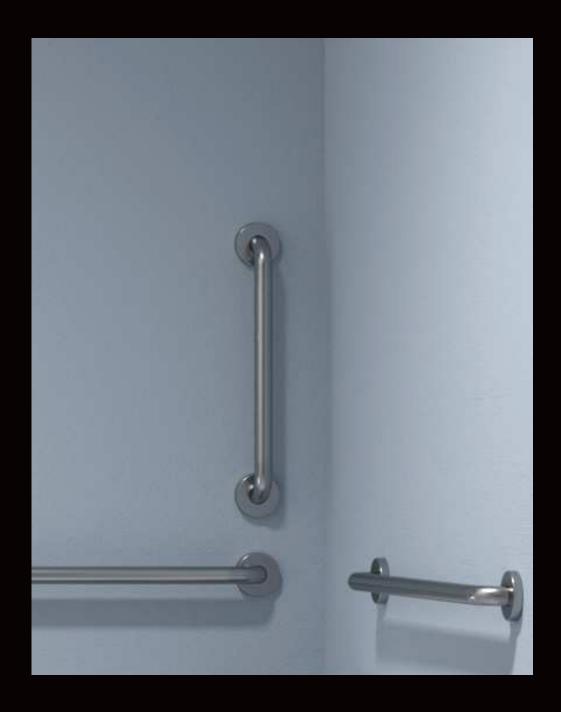

GRAB BARS





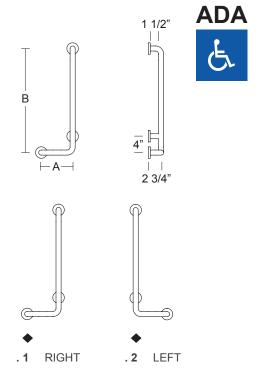

ITEM ◆	Α	В
4CS.422.001U . xx . x	18"	24"
4CS.422.002U . xx . x	18"	36"
4CS.422.003U . xx . x	24"	24"
4CS.422.004U . xx . x	24"	36"
4CS.422.005U . xx . x	30"	24"
4CS.422.006U . xx . x	30"	30"
4CS.422.007U . xx . x	30"	36"



90° GRAB BAR

Rail 1/16" (1,5 mm) thick, in type 316L stainless steel tubing with 1-17/64" (32 mm) outer diameter. Stainless steel bends connected with 3-3/16" (Ø 80 mm) flanges.

Cover in type 316L stainless steel. Mounting flanges with steel core 1/8" (3 mm) thickness, stainless steel covers and fully recyclable polyamide-6 wall protection. Each cover snaps over mounting flange to conceal mounting screws. Clearance between the grab bar and wall is 1-1/2" (38 mm).

For strength installation and maintenance see page 20.

MOUNTING KITS not included.

Optional mounting kit for concrete, natural stone, solid brick and hollow brick: KIT 4CN.0VM.0004.00.

Optional mounting kit for sheetrock wall and wooden plate: KIT 4CN.0VM.0010.00.

Optional mounting kit for toilet partition: KIT 4CN.0VM.0040.00.

One Mounting kit is required for each flange - see page 80.

SAFETY WARNING

Grab bars must be firmly secured to the anchors and the walls in order for them to support the weight they are designed for. Grab bars alone are not stronger than anchors and walls. In case the grab bar is not securely anchored to the wall, the building owner or maintenance personnel must remove it from service to avoid any accident or injury.

SUSTAINABILITY

This product contributes to LEED® credit


.XX	FINISH	.44	.43
.44	SATIN		
.43	BRIGHT		
I R\	/ light reflectance value	53	70





ADA











Dimensions: center to center

ITEM	•	Α	В
4CS.433.001U.	KX . X	42"	24"
4CS.433.002U.	X . X	42"	36"



"T" SHAPED GRAB BAR

♦ RIGHT

Rail 1/16" (1,5 mm) thick, in type 316L stainless steel tubing with 1-17/64" (32 mm) outer diameter. Stainless steel bends connected with 3-3/16" (\emptyset 80 mm) flanges.

Cover in type 316L stainless steel. Mounting flanges with steel core 1/8" (3 mm) thickness, stainless steel covers and fully recyclable polyamide-6 wall protection. Each cover snaps over mounting flange to conceal mounting screws. Clearance between the grab bar and wall is 1-1/2" (38 mm).

For strength installation and maintenance see page 20.

MOUNTING KITS not included.

Optional mounting kit for concrete, natural stone, solid brick and hollow brick: KIT 4CN.0VM.0004.00.

Optional mounting kit for sheetrock wall and wooden plate: KIT 4CN.0VM.0010.00.

Optional mounting kit for toilet partition: KIT 4CN.0VM.0040.00.

One Mounting kit is required for each flange - see page 80.

SAFETY WARNING

Grab bars must be firmly secured to the anchors and the walls in order for them to support the weight they are designed for. Grab bars alone are not stronger than anchors and walls. In case the grab bar is not securely anchored to the wall, the building owner or maintenance personnel must remove it from service to avoid any accident or injury.

SUSTAINABILITY

This product contributes to LEED® credit


.XX FII	NISH	.44	.43
.44 SA	ATIN		
.43 BF	RIGHT		
LRV ligh	nt reflectance value	53	70







ITEM ◆	Α	В	С
4CS.424.001U . xx . x	27 3/4"	27 3/4"	24"
4CS.424.002U . xx . x	27 3/4"	27 3/4"	30"
4CS.424.003U . xx . x	27 3/4"	27 3/4"	36"

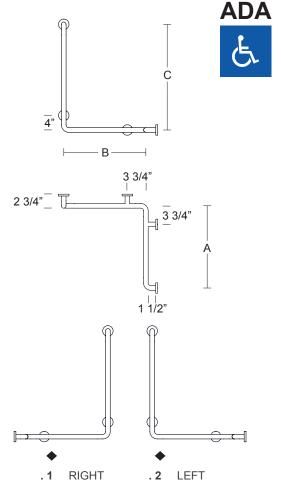





TWO-WALL GRAB BAR WITH VERTICAL RAIL

Rail 1/16" (1,5 mm) thick, in type 316L stainless steel tubing with 1-17/64" (32 mm) outer diameter. Stainless steel bends connected with 3-3/16" (Ø 80 mm) flanges.

Cover in type 316L stainless steel. Mounting flanges with steel core 1/8" (3 mm) thickness, stainless steel covers and fully recyclable polyamide-6 wall protection. Each cover snaps over mounting flange to conceal mounting screws. Clearance between the grab bar and wall is 1-1/2" (38 mm).

For strength installation and maintenance see page 20.

MOUNTING KITS not included.

Optional mounting kit for concrete, natural stone, solid brick and hollow brick: KIT 4CN.0VM.0004.00.

Optional mounting kit for sheetrock wall and wooden plate: KIT 4CN.0VM.0010.00. Optional mounting kit for toilet partition: KIT 4CN.0VM.0040.00.

One Mounting kit is required for each flange - see page 80.

SAFETY WARNING

Grab bars must be firmly secured to the anchors and the walls in order for them to support the weight they are designed for. Grab bars alone are not stronger than anchors and walls. In case the grab bar is not securely anchored to the wall, the building owner or maintenance personnel must remove it from service to avoid any accident or injury.

SUSTAINABILITY

This product contributes to LEED® credit

STAINLESS STEEL AISI 316L

.XX FINISH .44 SATIN .43 BRIGHT LRV light reflectance value 70














ITEM Α 4CS.440.001U.xx 12" 4CS.440.002U.xx 16" 4CS.440.003U.xx 18" 24" 4CS.440.004U.xx 4CS.440.005U.xx 30" 4CS.440.006U.xx 32" 4CS.440.007U.xx 36" 4CS.440.008U.xx 42" 4CS.440.009U.xx 48"



HORIZONTAL GRAB BAR

Full length bent rail 5/64" (2 mm) thick, in type 316L stainless steel tubing with 1-17/64" (32 mm) outer diameter connected with 3-3/16" (Ø 80 mm) flanges.

Cover in type 316L stainless steel. Mounting flanges with steel core 1/8" (3 mm) thickness, stainless steel covers and fully recyclable polyamide-6 wall protection. Each cover snaps over mounting flange to conceal mounting screws. Clearance between the grab bar and wall is 1-1/2" (38 mm).

For strength installation and maintenance see page 20.

MOUNTING KITS not included.

Optional mounting kit for concrete, natural stone, solid brick and hollow brick: KIT 4CN.0VM.0004.00.

Optional mounting kit for sheetrock wall and wooden plate: KIT 4CN.0VM.0010.00. Optional mounting kit for toilet partition: KIT 4CN.0VM.0040.00.

One Mounting kit is required for each flange - see page 80.

SAFETY WARNING

Grab bars must be firmly secured to the anchors and the walls in order for them to support the weight they are designed for. Grab bars alone are not stronger than anchors and walls. In case the grab bar is not securely anchored to the wall, the building owner or maintenance personnel must remove it from service to avoid any accident or injury.

SUSTAINABILITY

This product contributes to LEED® credit

.xx	FINISH	.44	.43
.44	SATIN		
.43	BRIGHT		
LRV	light reflectance value	53	70














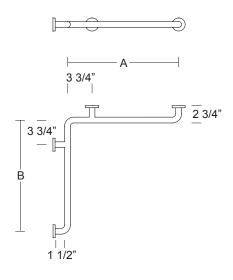

ITEM	Α	В
4CS.442.001U.xx	24 3/4"	36 3/4"
4CS.442.002U.xx	36 3/4"	54 3/4"
4CS.442.003U.xx	42 3/4"	54 3/4"



TWO-WALL GRAB BAR

Rail 1/16" (1,5 mm) thick, in type 316L stainless steel tubing with 1-17/64" (32 mm) outer diameter. Stainless steel bends connected with 3-3/16" (Ø 80 mm) flanges.

Cover in type 316L stainless steel. Mounting flanges with steel core 1/8" (3 mm) thickness, stainless steel covers and fully recyclable polyamide-6 wall protection. Each cover snaps over mounting flange to conceal mounting screws. Clearance between the grab bar and wall is 1-1/2" (38 mm).

For strength installation and maintenance see page 20.

MOUNTING KITS not included.

Optional mounting kit for concrete, natural stone, solid brick and hollow brick: KIT 4CN.0VM.0004.00.

Optional mounting kit for sheetrock wall and wooden plate: KIT 4CN.0VM.0010.00.

Optional mounting kit for toilet partition: KIT 4CN.0VM.0040.00.

One Mounting kit is required for each flange - see page 80.

SAFETY WARNING

Grab bars must be firmly secured to the anchors and the walls in order for them to support the weight they are designed for. Grab bars alone are not stronger than anchors and walls. In case the grab bar is not securely anchored to the wall, the building owner or maintenance personnel must remove it from service to avoid any accident or injury.

SUSTAINABILITY


This product contributes to LEED® credit

.XX FINISH	.44	.43
.44 SATIN		
.43 BRIGHT		
LRV light reflectance value	53	70







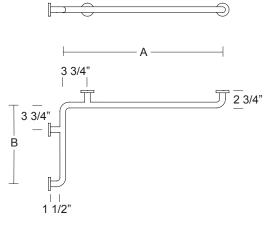

ITEM A E

4CS.442.004U.xx 51 3/4" 45 3/4"



CORNER GRAB BAR FOR SHOWER STALL

Rail 1/16" (1,5 mm) thick, in type 316L stainless steel tubing with 1-17/64" (32 mm) outer diameter. Stainless steel bends connected with 3-3/16" (Ø 80 mm) flanges.

Cover in type 316L stainless steel. Mounting flanges with steel core 1/8" (3 mm) thickness, stainless steel covers and fully recyclable polyamide-6 wall protection. Each cover snaps over mounting flange to conceal mounting screws. Clearance between the grab bar and wall is 1-1/2" (38 mm).

For strength installation and maintenance see page 20.

MOUNTING KITS not included.

Optional mounting kit for concrete, natural stone, solid brick and hollow brick: KIT 4CN.0VM.0004.00.

Optional mounting kit for sheetrock wall and wooden plate: KIT 4CN.0VM.0010.00.

Optional mounting kit for toilet partition: KIT 4CN.0VM.0040.00.

One Mounting kit is required for each flange - see page 80.

SAFETY WARNING

Grab bars must be firmly secured to the anchors and the walls in order for them to support the weight they are designed for. Grab bars alone are not stronger than anchors and walls. In case the grab bar is not securely anchored to the wall, the building owner or maintenance personnel must remove it from service to avoid any accident or injury.

SUSTAINABILITY

This product contributes to LEED® credit

STAINLESS STEEL AISI 316L

 .XX FINISH
 .44
 .43

 .44 SATIN
 .43
 .44

 .43 BRIGHT
 .43
 .44

 LRV light reflectance value
 53
 70

















ITEM A
4CS.445.001U . xx 29"
4CS.445.002U . xx 32"
4CS.445.003U . xx 34"

SWING UP GRAB BAR

Rail 3/64" (1,2 mm) thick in type-316 stainless steel tubing with 1-17/64" (32 mm) outer diameter.

Backplate in type-316 stainless steel 13/64 (5 mm) thick with fully recyclable polyamide-6 wall protection. 4 screw holes for attachment to wall.

Spring Load Rotation system with adjustable friction in fully recyclable polyamide-6 and diecast aluminum inner core.

For strength installation and maintenance see page 20.

MOUNTING KITS not included.

Optional mounting kit for concrete, natural stone, solid brick and hollow brick: KIT 4CN.0VM.001A.00. Optional mounting kit for sheetrock wall and wooden plate: KIT 4CN.0VM.009A.00.

SAFETY WARNING

Grab bars must be firmly secured to the anchors and the walls in order for them to support the weight they are designed for. Grab bars alone are not stronger than anchors and walls. In case the grab bar is not securely anchored to the wall, the building owner or maintenance personnel must remove it from service to avoid any accident or injury.

SUSTAINABILITY

This product contributes to LEED® credit


STAINLESS STEEL AISI 316L











ITEM A

4CS.434.0000 . xx 19 5/16"



STAINLESS STEEL WC BACKREST

Rail 1/16" (1,5 mm) thick, in type 316L stainless steel tubing with 1-17/64" (32 mm) outer diameter. Stainless steel bends connected with 3-3/16" (Ø 80 mm) flanges.

Cover in type 316L stainless steel. Mounting flanges with steel core 1/8" (3 mm) thickness, stainless steel covers and fully recyclable polyamide-6 wall protection. Each cover snaps over mounting flange to conceal mounting screws. Backrest in black foamed polyurethane.

Mounting kit for solid brick / concrete included.

For strength installation and maintenance see page 20.

MOUNTING KITS

Included mounting kit for concrete, natural stone, solid brick and hollow brick: KIT 4CN.0VM.0004.00. Optional mounting kit for sheetrock wall and wooden plate: KIT 4CN.0VM.0010.00. Available on request. One Mounting kit is required for each flange - see page 80.

SUSTAINABILITY

This product contributes to LEED® credit


STAINLESS STEEL AISI 316L

.XX FINISH .44 .43
.44 SATIN
.43 BRIGHT
LRV light reflectance value 53 70




SHOWER SEATS



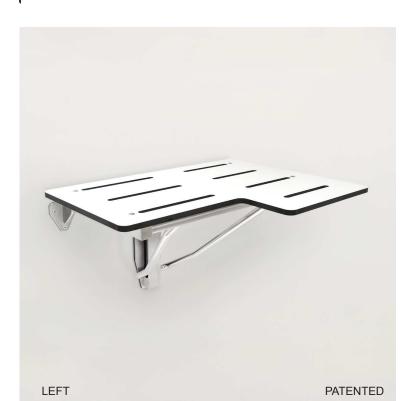



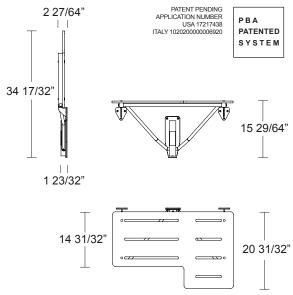

ITEM A
4CS.447.UL01 . xx 21"
4CS.447.UL02 . xx 27"
4CS.447.UL03 . xx 33"

see Technical Data Sheet for load capacity

FOLDING SHOWER SEAT

Seat ½" (13 mm) thick solid high pressure laminated (HPL) with slots for water drainage, connected to frame with type-316 stainless steel bolts. Reversible for left / right installation on site.

Frame type-316L satin finish stainless steel 1-1/4" (30 mm) square tube connected with 25/32" (20 mm) diameter tube. Mounting flanges and Guide Bracket in type-316L satin finish stainless steel 15/64" (6 mm) thick with fully recyclable polyamide-6 wall protection. 9 screw holes for attachment to wall. Adjustable frictioning system.

MOUNTING KITS not included.

Optional mounting kit for concrete, natural stone, solid brick and hollow brick: KIT 4CN.0VM.0042.00. Optional mounting kit for sheetrock wall and wooden plate: KIT 4CN.0VM.0043.00.

SUSTAINABILITY

This product contributes to LEED® credit

STAINLESS STEEL AISI 316L


SEAT
STANDARD FINISH
WHITE
BLACK









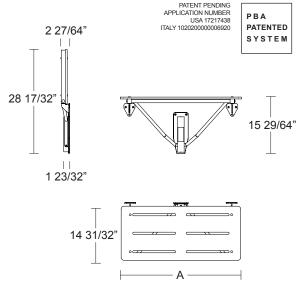

ITEM A
4CS.447.UR01 . xx 21"
4CS.447.UR02 . xx 27"
4CS.447.UR03 . xx 33"

see Technical Data Sheet for load capacity

FOLDING SHOWER SEAT

Seat $\frac{1}{2}$ " (13 mm) thick solid high pressure laminated (HPL) with slots for water drainage, connected to frame with type-316 stainless steel bolts.

Frame type-316L satin finish stainless steel 1-1/4" (30 mm) square tube connected with 25/32" (20 mm) diameter tube. Mounting flanges and Guide Bracket in type-316L satin finish stainless steel 15/64" (6 mm) thick with fully recyclable polyamide-6 wall protection. 9 screw holes for attachment to wall. Adjustable frictioning system.

MOUNTING KITS not included.

Optional mounting kit for concrete, natural stone, solid brick and hollow brick: KIT 4CN.0VM.0042.00. Optional mounting kit for sheetrock wall and wooden plate: KIT 4CN.0VM.0043.00.

SUSTAINABILITY

This product contributes to LEED® credit

STAINLESS STEEL AISI 316L









SHOWER ACCESSORIES







ITEM	Α	Ŷ
4CS.429.001U . xx	32"	8
4CS.429.002U . xx	36"	9
4CS.429.003U . xx	42"	10
4CS.429.004U . xx	48"	12
4CS.429.005U . xx	60"	15
4CS.429.006U . xx	72"	18

SPARE PART





WALL TO WALL SHOWER CURTAIN RAIL

Rail 1/16" (1,5 mm) thick, in type 316L stainless steel tubing with 1-17/64" (32 mm) outer diameter.

Cover in type 316L stainless steel. Mounting flanges with steel core 1/8" (3 mm) thickness, stainless steel covers and fully recyclable polyamide-6 wall protection. Each cover snaps over mounting flange to conceal mounting screws.

Fully recyclable polyamide-6 curtain rings included.

MOUNTING KITS not included.

Optional mounting kit for concrete, natural stone, solid brick and hollow brick: KIT 4CN.0VM.0004.00. Optional mounting kit for sheetrock wall and wooden plate: KIT 4CN.0VM.0010.00. One Mounting kit is required for each flange - see page 80.

SUSTAINABILITY


This product contributes to LEED® credit

STAINLESS STEEL AISI 316L

.XX FINISH .44 .43
.44 SATIN
.43 BRIGHT
LRV light reflectance value 53 70





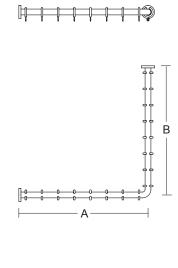

ITEM A B
4CS.436.001U.xx 32" 32" 16

SPARE PART





CORNER SHOWER CURTAIN RAIL

Rail 1/16" (1,5 mm) thick, in type 316L stainless steel tubing with 1-17/64" (32 mm) outer diameter. Stainless steel bends connected with tubes.

Cover in type 316L stainless steel. Mounting flanges with steel core 1/8" (3 mm) thickness, stainless steel covers and fully recyclable polyamide-6 wall protection. Each cover snaps over mounting flange to conceal mounting screws. Fully recyclable polyamide-6 curtain rings included.

MOUNTING KITS not included.

Optional mounting kit for concrete, natural stone, solid brick and hollow brick: KIT 4CN.0VM.0004.00. Optional mounting kit for sheetrock wall and wooden plate: KIT 4CN.0VM.0010.00. One Mounting kit is required for each flange - see page 80.

SUSTAINABILITY

This product contributes to LEED® credit

STAINLESS STEEL AISI 316L


 .XX FINISH
 .44
 .43


 .44 SATIN
 .43
 .43

 .43 BRIGHT
 .43
 .43









ITEM	Α	В	Ŷ
4CS.436.0P1U . xx	32"	32"	16

SPARE PART





CORNER SHOWER CURTAIN RAIL WITH WALL SUPPORTS

Rail 1/16" (1,5 mm) thick, in type 316L stainless steel tubing with 1-17/64" (32 mm) outer diameter. Stainless steel bends connected with tubes.

Cover in type 316L stainless steel. Mounting flanges with steel core 1/8" (3 mm) thickness, stainless steel covers and fully recyclable polyamide-6 wall protection. Each cover snaps over mounting flange to conceal mounting screws. Fully recyclable polyamide-6 curtain rings included.

MOUNTING KITS not included.

Optional mounting kit for concrete, natural stone, solid brick and hollow brick: KIT 4CN.0VM.0004.00. Optional mounting kit for sheetrock wall and wooden plate: KIT 4CN.0VM.0010.00. One Mounting kit is required for each flange - see page 80.

SUSTAINABILITY

This product contributes to LEED® credit

STAINLESS STEEL AISI 316L

 .XX FINISH
 .44
 .43


 .44 SATIN
 .43
 .44


 .43 BRIGHT
 .43
 .44

 LRV light reflectance value
 53
 70









Dimensions: center to center

ITEM	Α	В	С	Ŷ
4CS.436.0B1U.xx	32"	32"	17"	16
4CS.436.0B2U . xx	36"	36"	17"	18
4CS.436.0B3U . xx	42"	42"	17"	20







CORNER SHOWER CURTAIN RAIL WITH CEILING SUPPORT

Rail 1/16" (1,5 mm) thick, in type 316L stainless steel tubing with 1-17/64" (32 mm) outer diameter. Stainless steel bends connected with tubes.

Cover in type 316L stainless steel. Mounting flanges with steel core 1/8" (3 mm) thickness, stainless steel covers and fully recyclable polyamide-6 wall protection. Each cover snaps over mounting flange to conceal mounting screws. Fully recyclable polyamide-6 curtain rings included.

MOUNTING KITS not included.

Optional mounting kit for concrete, natural stone, solid brick and hollow brick: KIT 4CN.0VM.0004.00. Optional mounting kit for sheetrock wall and wooden plate: KIT 4CN.0VM.0010.00. One Mounting kit is required for each flange - see page 80.

SUSTAINABILITY

This product contributes to LEED® credit

STAINLESS STEEL AISI 316L

 .XX FINISH
 .44
 .43


 .44 SATIN
 .43


 .43 BRIGHT
 .43

 LRV light reflectance value
 53
 70









Dimensions: center to center

ITEM	Α	В	С	Y
4CS.437.001U . xx	32"	32"	17"	24







THREE SIDES SHOWER CURTAIN RAIL WITH CEILING SUPPORT

Rail 1/16" (1,5 mm) thick, in type 316L stainless steel tubing with 1-17/64" (32 mm) outer diameter. Stainless steel bends connected with tubes.

Cover in type 316L stainless steel. Mounting flanges with steel core 1/8" (3 mm) thickness, stainless steel covers and fully recyclable polyamide-6 wall protection. Each cover snaps over mounting flange to conceal mounting screws. Fully recyclable polyamide-6 curtain rings included.

MOUNTING KITS not included.

Optional mounting kit for concrete, natural stone, solid brick and hollow brick: KIT 4CN.0VM.0004.00. Optional mounting kit for sheetrock wall and wooden plate: KIT 4CN.0VM.0010.00. One Mounting kit is required for each flange - see page 80.

SUSTAINABILITY

This product contributes to LEED® credit

STAINLESS STEEL AISI 316L

 .XX FINISH
 .44
 .43


 .44 SATIN
 .43


 .43 BRIGHT
 .43

 LRV light reflectance value
 53
 70









Dimensions: center to center

ITEM	Α	В	С	Ŷ
4CS.437.0B1U . xx	32"	32"	17"	24

SPARE PART





THREE SIDES SHOWER CURTAIN RAIL WITH DOUBLE CEILING SUPPORT

Rail 1/16" (1,5 mm) thick, in type 316L stainless steel tubing with 1-17/64" (32 mm) outer diameter. Stainless steel bends connected with tubes.

Cover in type 316L stainless steel. Mounting flanges with steel core 1/8" (3 mm) thickness, stainless steel covers and fully recyclable polyamide-6 wall protection. Each cover snaps over mounting flange to conceal mounting screws. Fully recyclable polyamide-6 curtain rings included.

MOUNTING KITS not included.

Optional mounting kit for concrete, natural stone, solid brick and hollow brick: KIT 4CN.0VM.0004.00. Optional mounting kit for sheetrock wall and wooden plate: KIT 4CN.0VM.0010.00. One Mounting kit is required for each flange - see page 80.

SUSTAINABILITY

This product contributes to LEED® credit

STAINLESS STEEL AISI 316L

 .XX FINISH
 .44
 .43


 .44 SATIN
 .43

 .43 BRIGHT
 .43

 LRV light reflectance value
 53
 70







Dimensions: center to center

ITEM	Α
4CS.487.001U.xx	18"
4CS.487.002U.xx	24"
4CS.487.003U.xx	30"
4CS.487.004U.xx	36"
4CS.487.005U.xx	42"

SPARE PART





VERTICAL SHOWER HEAD HOLDER RAIL

Rail 1/16" (1,5 mm) thick, in type 316L stainless steel tubing with 1-17/16" (32 mm) outer diameter. Stainless steel bends connected with 3-3/16" (Ø 80 mm) flanges.

Cover in type 316L stainless steel. Mounting flanges with steel core 1/8" (3 mm) thickness, stainless steel covers and fully recyclable polyamide-6 wall protection. Each cover snaps over mounting flange to conceal mounting screws. Adjustable fully recyclable polyamide-6 shower head holder included.

MOUNTING KITS not included.

Optional mounting kit for concrete, natural stone, solid brick and hollow brick: KIT 4CN.0VM.0004.00. Optional mounting kit for sheetrock wall and wooden plate: KIT 4CN.0VM.0010.00. One Mounting kit is required for each flange - see page 80.

SUSTAINABILITY

This product contributes to LEED® credit

STAINLESS STEEL AISI 316L


.XX FINISH .44 .43
.44 SATIN .43 BRIGHT
LRV light reflectance value 53 70



WASHROOM ACCESSORIES





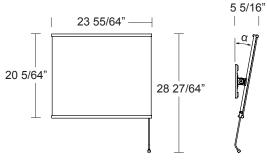

ITEM α

4CS.470.000D.xx 10°

ADJUSTABLE MIRROR WITH STAINLESS STEEL FRAME AND CONTROL ROD

Adjustable crystal glass 15/64" (6 mm) thickness mirror pane with stainless steel frame and control rod. Mounting plate in fully recyclable polyamide-6 with diecast zamak 15 and adjustable friction.

4 screws holes for attachment to wall.

Mounting kit for solid brick / concrete included.


SUSTAINABILITY

This product contributes to LEED® credit

STAINLESS STEEL AISI 316L







ITEM	Α	В
4CS.490.000R . xx	23 5/8"	21 21/32"
4CS.490.00QR . xx	23 5/8"	27 9/16"
4CS.490.00AR . xx	23 5/8"	39 3/8"

SPARE PART



FIXED MIRROR WITH STAINLESS STEEL HOLDERS

Crystal glass 15/64" (6 mm) thickness mirror pane attached to wall with 4 fully recyclable polyamide-6 wall supports included. Stainless steel caps to conceal fixing screws. Mounting kit for solid brick / concrete included.

SUSTAINABILITYThis product contributes to LEED® credit

STAINLESS STEEL AISI 316L

.XX FINISH .44 SATIN .43 BRIGHT LRV light reflectance value 70









Dimensions: center to center

ITEM Α

15 3/4" 4CS.489.0000 . xx 4CS.489.000A.xx 19 11/16" 4CS.489.000B.xx 23 5/8"

STAINLESS STEEL TOWEL HOLDER

Stainless steel bent tube Ø5/8" (16 mm) outer diameter connected with Ø1-31/32" (50 mm) flanges with stainless steel covers.

Mounting kit for solid brick / concrete included.


SUSTAINABILITYThis product contributes to LEED® credit

STAINLESS STEEL AISI 316L

.XX FINISH .44 SATIN .43 BRIGHT





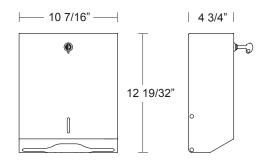

4CS.498.0000.44

STAINLESS STEEL PAPER TOWEL DISPENSER

Stainless steel wall over mounted towel dispenser compatible with "Z" folded towels. Window on front to check towels level. Opening / closing operation secured by key Mounting kit for solid brick / concrete included.

SUSTAINABILITYThis product contributes to LEED® credit


STAINLESS STEEL AISI 316L

FINISH

.44 SATIN





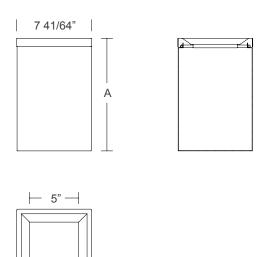

ITEM A

4CS.011.0000.xx 11 29/64" 2,11 US gal **4CS.012.0000**.xx 16 31/32" 3,17 US gal

STAINLESS STEEL PAPER BIN

Stainless steel paper basket with rubber feet and sliding cover. Internal steel bag holder. Wall mounting kit not included. Available as optional.

SUSTAINABILITY


This product contributes to LEED® credit

STAINLESS STEEL AISI 316L

.XX FINISH .44 .43
.44 SATIN .43 BRIGHT







4CS.483.0IBN.xx

STAINLESS STEEL SHELF WITH POLYAMIDE-6 TUMBLER

Shelf made in stainless steel bent tube Ø5/8" (16 mm) outer diameter with stainless steel plate. Fully recyclable polyamide-6 tumbler. Mounting kit for solid brick / concrete included.

SUSTAINABILITY

This product contributes to LEED® credit

STAINLESS STEEL AISI 316L




TOILET ACCESSORIES









4CN.457.0000.17

HYGIENE BAG DISPENSER

Fully recyclable polyamide-6 cover connected to black abs mounting plate. Mounting kit for solid brick / concrete included.

SUSTAINABILITYThis product contributes to LEED® credit


POLYAMIDE 6

FINISH









4CS.481.0000 . xx

STAINLESS STEEL PAPER ROLL HOLDER

Stainless steel bent tube and wall support Ø5/8" (16 mm) outer diameter. Stainless steel wall support and fully recyclable polyamide-6 end cap.

Mounting kit for solid brick / concrete included.

SUSTAINABILITY


This product contributes to LEED® credit

STAINLESS STEEL AISI 316L

.XX FINISH .44 .43 .44 SATIN .43 BRIGHT







4CS.481.00RL.xx

STAINLESS STEEL PAPER ROLL HOLDER

Stainless steel tube and wall support \emptyset 5/8" (16 mm) outer diameter. Stainless steel wall support. Mounting kit for solid brick / concrete included.

SUSTAINABILITY


This product contributes to LEED® credit

STAINLESS STEEL AISI 316L

.XX FINISH .44 .43
.44 SATIN .43 BRIGHT







4CS.481.000R.xx



STAINLESS STEEL PAPER ROLL HOLDER

1-17/64" (32 mm) outer diameter stainless steel tube connected with 2-23/64" (Ø 60 mm) flange. *Cover* in type 316L stainless steel which snaps over mounting flange to conceal mounting screws. Mounting kit for solid brick / concrete included.

SUSTAINABILITY


This product contributes to LEED® credit

STAINLESS STEEL AISI 316L

.XX FINISH .44 SATIN .43 BRIGHT







4CS.486.000H.xx



4CS.486.00HR.44 Spare toilet brush page 78

SPARE PART



STAINLESS STEEL TOILET BRUSH SET

Tumbler 3-5/32" (Ø80 mm) and brush handle Ø5/8" (16 mm) in stainless steel. Mounting plate in fully recyclable polyamide-6. Mounting kit for solid brick / concrete included.


SUSTAINABILITY

This product contributes to LEED® credit

STAINLESS STEEL AISI 316L







4CS.486.0000 . xx



4CS.486.00CR.17 Spare toilet brush

SPARE PART



STAINLESS STEEL TOILET BRUSH SET WITH POLYAMIDE-6 HANLDE

Tumbler 3-5/32" (Ø80 mm) in stainless steel and brush handle fully recyclable polyamide-6. Mounting plate in fully recyclable polyamide-6.

Mounting kit for solid brick / concrete included.

SUSTAINABILITY

This product contributes to LEED® credit

STAINLESS STEEL AISI 316L




SPECIAL ACCESSORIES









Dimensions: center to center

ITEM

4CS.492.0000 . xx

STAINLESS STEEL WALL SHELF

Shelf made in stainless steel tube \varnothing 5/8" (16 mm) outer diameter with stainless steel plate. Mounting kit for solid brick / concrete included.

SUSTAINABILITY


This product contributes to LEED® credit

STAINLESS STEEL AISI 316L

.XX FINISH .44 .43
.44 SATIN .43
BRIGHT







4CS.493.0000 . xx

STAINLESS STEEL CORNER SHELF

Shelf made in stainless steel tube $\varnothing 5/8$ " (16 mm) outer diameter with stainless steel plate. Mounting kit for solid brick / concrete included.

SUSTAINABILITY


This product contributes to LEED® credit


STAINLESS STEEL AISI 316L

.XX FINISH .44 .43
.44 SATIN .43
BRIGHT









Dimensions: center to center

ITEM

4CS.485.00IN.xx

STAINLESS STEEL WALL SHELF WITH POLYAMIDE-6 TUMBLER

Shelf made in stainless steel tube Ø5/8" (16 mm) outer diameter with stainless steel plate. Tumbler in fully recyclable polyamide-6. Mounting kit for solid brick / concrete included.


SUSTAINABILITYThis product contributes to LEED® credit

STAINLESS STEEL AISI 316L

.XX FINISH .44 SATIN .43 BRIGHT LRV light reflectance value 70





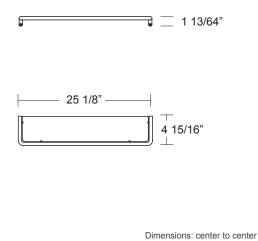

4CS.484.0000 . xx

STAINLESS STEEL WALL SHELF

Shelf made in stainless steel tube Ø5/8" (16 mm) outer diameter with stainless steel plate. Mounting kit for solid brick / concrete included.


SUSTAINABILITYThis product contributes to LEED® credit

STAINLESS STEEL AISI 316L

.XX FINISH .44 SATIN .43 BRIGHT LRV light reflectance value 70







4CS.488.000C.xx

STAINLESS STEEL CLOTH HOOK Stainless steel \emptyset 5/8" (16 mm) curved hook with 1-31/32" (50 mm) flange.


SUSTAINABILITYThis product contributes to LEED® credit

STAINLESS STEEL AISI 316L

.XX FINISH .44 SATIN .43 BRIGHT







4CS.488.0000 . xx

STAINLESS STEEL SINGLE CLOTH HOOKStainless steel Ø25/64" (10 mm) single hook with 1-31/32" (50 mm) flange.


SUSTAINABILITYThis product contributes to LEED® credit

STAINLESS STEEL AISI 316L

.XX FINISH .44 SATIN .43 BRIGHT







4CS.488.000D.xx

STAINLESS STEEL DOUBLE CLOTH HOOK

Stainless steel Ø25/64" (10 mm) double hook with 1-31/32" (50 mm) flange.

SUSTAINABILITY


This product contributes to LEED $\!^{^{\tiny (\!R\!)}}\!$ credit

STAINLESS STEEL AISI 316L

.XX FINISH .44 .43
.44 SATIN .43 BRIGHT







5CS.562.0000 . xx

STAINLESS STEEL DOOR-STOP CLOTH HOOK

Stainless steel Ø29/32" (23 mm) hook / door stop with black rubber cap. Stainless steel Ø1-31/32" (Ø 50 mm) flange.


SUSTAINABILITY

This product contributes to LEED® credit

STAINLESS STEEL AISI 316L

.XX FINISH .44 .43
.44 SATIN .43
BRIGHT






2MM.402.0000. xx

STAINLESS STEEL PLATE WITH LADIES PICTOGRAM

Stainless steel wall plate 5/64" (2 mm) thickness with woman pictogram.



ITEM


2MM.404.0000 . xx

STAINLESS STEEL PLATE WITH INTERNATIONAL SYMBOL OF ACCESSIBILITY PICTOGRAM

Stainless steel wall plate 5/64" (2 mm) thickness with International Symbol of Accessibility pictogram.

STAINLESS STEEL AISI 316L





ITEM

2MM.401.0000 . xx

STAINLESS STEEL PLATE WITH GENTLEMEN PICTOGRAM

Stainless steel wall plate 5/64" (2 mm) thickness with man pictogram.






4CS.0AN.0003.17

SPARE POLYAMIDE-6 CURTAIN RING

Spare fully recyclable polyamide-6 curtain ring.




ITEM

4CS.490.0WHR.xx

SPARE STAINLESS STEEL HOLDERS FOR FIXED MIRROR

Set of 4 fully recyclable polyamide-6 wall supports with stainless steel caps for fixed mirror.




ITEM

4CS.487.00RD.17

SHOWER HEAD HOLDER

Shower head holder in polyamide-6, adjustable in height and inclination, can be used one-handed with the control lever. Compatible with the PROGRAMMA 4CS rails.




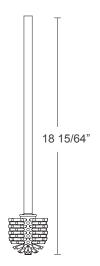

4CS.486.00HR.44

STAINLESS STEEL SPARE TOILET BRUSH HANDLE

Spare stainless steel handle with toilet brush.




ITEM

4CS.486.000B.00

SPARE TOILET BRUSH HEAD

Spare brush for WC brush set.



ITEM

4CS.486.00CR.17


POLYAMIDE-6 SPARE TOILET BRUSH HANDLE

Spare polyamide-6 handle with toilet brush.






GRAB BARS AND SHOWER CURTAIN RAILS FLANGE MOUNTING INSTRUCTIONS



ITEM

GRAB BAR FLANGE 4CS.422, 4CS.433, 4CS.424, 4CS.440, 4CS.442, 4CS.434 SHOWER CURTAIN RAIL FLANGE 4CS.429, 4CS.436, 4CS.437 4CS.487


CONCRETE, NATURAL STONE, SOLID BRICK, HOLLOW BRICK



KIT 4CN.0VM.0004.00



SHEETROCK WALL, WOODEN PLATE





KIT 4CN.0VM.0010.00

Included:



TOILET PARTITION thickness from 1/2" to 1"







0

Included:

1 x stainless steel backing


♥ 3 x 16mm screws for 1/2" panel


3 x 25mm screws for 3/4" panel


3 x 30mm screws for 1" panel

3 x stainless steel nuts













SWING-UP GRAB BAR MOUNTING INSTRUCTIONS



SWING-UP GRAB BAR 4CS.445

CONCRETE, NATURAL STONE, SOLID BRICK, HOLLOW BRICK




KIT 4CN.0VM.001A.00



Included: 4 x plugs 4 x screws

4 x chrome washers

SHEETROCK WALL, WOODEN PLATE





KIT 4CN.0VM.009A.00




4 x screws

4 x chrome washers

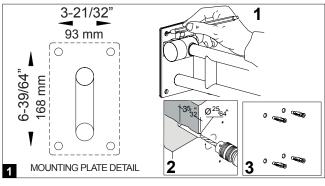

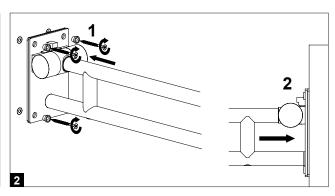






FOLDING SHOWER SEAT MOUNTING INSTRUCTIONS



ITEM
FOLDING SHOWER SEAT
4CS.447


CONCRETE, NATURAL STONE, SOLID BRICK, HOLLOW BRICK



KIT 4CN.0VM.0042.00










KIT 4CN.0VM.0043.00



















GENERAL CONDITIONS OF SALE

- 1.1 The supply of the products shown in this pricelist ("Products") of PBA SpA ("PBA") shall be governed by these general conditions of sale ("General Conditions"). These General Conditions shall apply also to the sale of spare parts, when possible.
- 1.2 The sale agreement of the Products ("Agreement") is entered into force among the parties upon the Client's receipt of PBA's order con

These General Conditions shall be deemed as an integral and essential

- part of any Agreement.

 1.3 These General Conditions shall be executed by the Client and at tached to the first purchase order sent to PBA, it being agreed that they shall accordingly apply to any following Agreement.
- 1.4. These General Conditions shall be deemed as tacitly accepted by the Client for any supply of Products, unless expressly rejected in writing by the Client by means of notice thereof to be sent to PBA at the latest within 5 (five) days as of the date of receipt of PBA's confirmation of the first

purchase order sent by the Client.

Should the Client expressly reject one or more of these General Conditions within the above term, PBA shall be free to withdraw from the relevant Agreement, by means of written communication thereof and without any further obligation.

1.5 In no event shall any general conditions of any nature, inserted and/

or specified in the Client's order forms and/or in other documents sent to PBA by the Client, and/or of which the latter was made aware in any manner whatsoever, apply to any Agreement and/or to any supply of

Any special term and/or condition of supply suggested by the Client shall apply to the Agreement only if expressly contained in PBA's order confirmation.

Any change and/or amendment to these General Conditions shall be binding and valid only if accepted in writing by both parties.

2. PLACE AND TERMS OF DELIVERY OF THE PRODUCTS

2.1 The choice of an Incoterm does not affect the location of the place of delivery of the Products which, in any case, shall be deemed as delivered to the Client at the place and in the moment in which they are put at disposal of the haulier, for the relevant transport, at PBA's premises in Tezze sul Brenta (Vicenza), Italy.

In any case, unless otherwise agreed in writing by the parties, PBA shall never be liable for delays accrued during the transportation.

- 2.2 The terms of delivery of the Products (i) are specified in PBA's order
- 2.2 Ine terms of delivery of the Products (I) are specified in PBAs order confirmation, (ii) are approximate and roughly set forth and (iii) in no case shall they be construed as of essence.
 2.3 In case of delay in the delivery of the Products at PBA's premises, caused by a fortuitous event, force majeure or other causes not depend ing on PBA's willful misconduct and/or gross negligence, the Client shall not be entitled to claim any compensation for damages, nor to ask for the termination of the Agreement and/or for the reduction of the price of the Products. of the Products.

3 INCOTERMS

Unless otherwise agreed in writing, the Products and the relevant prices are to be considered with delivery Ex-works (EXW – Incoterms 2000), PBA's premises in Tezze sul Brenta (VI), Italy or at the different place indicated by PBA in the notice Products ready for delivery.

- 4. ORDERS NON STANDARD AND/OR MADE TO MEASURE PRODUCTS 4.1 The purchase orders shall be made in writing and completed with all
- 4.1 The proclases orders small be flader in whiting and complete with all the data required for the relevant design and manufacture.

 4.2 When already approved by the Client for the supply of catalogue Products, it is agreed that these General Conditions shall also apply to the sale orders related to non standard Products, Products out of cata logue and/or to be made to measure, if confirmed by PBA.
 4.3 Any delay of the Client in the transmission of data, measures and/
- or technical specifications of the Products subject matter of the Agree ment may cause a proportional postponement of the delivery terms, to be newly determined by PBA on the basis of its industrial needs

5. PRICES AND PAYMENTS

5.1 The prices of the Products indicated in this pricelist are merely in dicative and can be modified at any time by PBA.

The actual price of the Products is specified in PBA's order confirmation and, unless otherwise specified, it is deemed as net of VAT.

Any change and/or modification of the Products, agreed by the parties af ter the transmission of PBA's order confirmation, shall cause the adjust ment of the relevant price due to any increase of the costs of production and/or of the raw materials, as agreed from time to time by the parties. 5.2. The price of the Products shall be paid by the Client as per the terms and ways specified in PBA's order confirmation, or otherwise agreed by

the parties.

Any late collection or non collection of the Products shall not cause an extension and/or postponement of the terms of payment.
5.3 PBA shall be entitled to suspend the delivery of the Products should:

- (a) the Client's assets and/or financial standings endanger the relevant payment; (b) the Client fail to timely pay Products previously supplied by PBA, also on the basis of other Agreements, until full payment of the outstanding credit and/or until receipt of proper guarantees of the Client for any delivery in progress, without prejudice to PBA's right to claim for any damages suffered as a consequence thereof.
- 5.4 In no event shall any vice and/or defect of the Products, even when expressly acknowledged as such by PBA, and/or any delay of delivery as to the agreed terms give the Client the right to suspend the relevant pay ments and/or any other payment for whichever reason due to PBA also under other contractual relationships.

 5.5 In case of late payments, PBA shall be entitled to charge interests on
- the unpaid amount at the rate provided by the law.
 5.6 In no case shall the Client be entitled to set off any amount due to
- PBA in force of any Agreement against any amount due by PBA at any title whatsoever.

6. RETENTION OF TITLE

PBA shall be the sole owner of the Products until the date of their full payment.

Should the Agreement be terminated due to the Client's breach of con tract, any Client's advance payment shall be kept by PBA as an indemnity within the limits set forth by the law, without prejudice to the latter's right to claim for further damages.

7. WARRANTY

- 7.1 PBA guarantees that the Products will be free from vices and defects
- 7.1 PBA guarantees that the Products will be free involves and otelects in materials and workmanship for a period of 24 (twenty-four) months as of the date of the relevant delivery ("Warranty Period").

 7.2 Should the complaints raised by the Client within the Warranty Period with reference to the Products be grounded and accepted by PBA, the latter shall, at its exclusive discretion, repair and/or replace-the defective Product/s or the defective component/s of the same, with delivery Ex-works (EXW Incoterms 2000) PBA's premises in Tezze sul Brenta (VI), Italy,

The warranty obligations herewith undertaken shall be effective and bind ing only provided that PBA has the opportunity to verify the vices and/or defects raised by the Client.

DBA's warranty obligation shall be deemed as entirely fulfilled with the removal of the vice and/or defect raised by the Client, or with the replace ment of the defective Product and/or component, without any further obligations.

Unless otherwise agreed in writing by the parties, all the expenses for re turning to PBA the defective Products and/or components, as well as all the additional expenses related to the operations of repair or replacement shall be borne by the Client and shall be at the Client's risk.

7.3 Subject to the loss of warranty, the Client shall notify in writing, by

registered letter return receipt requested, any vices and/or defects found within and not later than 8 (eight) days as of the date of the actual delivery of the Products, or, in case of hidden vices or defects, within and not later than 8 (eight) days as of the date of the relevant discovery.

7.4 The warranty is expressly excluded for vices and/or defects of the Products arising from or consisting in:
(i) any repair, alteration and/or modification not authorized in writing by

- (ii) normal wear and tear of the materials or of single components; (iii) improper use and/or application of the Products;
- (iv) defects and/or mistakes in the measures and/or technical specifica tions supplied by the Client;
- (v) deposit, maintenance and/or cleaning not in compliance with PBA's instructions;
- (vi) installation not in compliance with PBA's instructions and/or carried out with non suitable materials;

(vii) any other event for which PBA is not directly liable. Should the Client fail to regularly pay the agreed price, even if such de fault or such delay concerns a single part of the aggregate price of the Products, the warranty shall not apply.

7.5 Without prejudice to the compulsory product's liability law and any liability for willful misconduct and/or gross negligence, PBA shall not be liable for direct, indirect or incidental damages caused to the Client and and/or to third parties as a consequence of the defects of the Products. The Client shall not be entitled to terminate the Agreement in case of vices and/or defects of the Products subject matter of this warranty,

should PBA timely comply with the relevant obligations.
7.6 The Products made of wood, pvc, rubber, rolled sections and/or of other natural materials shall be of a quality equal, within the limits of a reasonable similarity, to the relevant samples examined by the Client

before the execution of the Agreement.
In no case shall therefore the samples of the Products examined by the Client be qualified as the exclusive standard for the exterior appearance of the Products.

Without prejudice to the warranty regulated by this clause 7, any chro matic and/or aesthetic difference (nervation of the wood, intensity of the colour shades, etc.) of the delivered Products compared to the-characteristics of the relevant samples examined by the Client, shall not entitle the latter to terminate the Agreement and/or to ask for the replacement of the Products or for the reduction of the price.

7.7. In no event shall the chromatic differences between Products of the same type and/or colour, delivered with different lots and/or in different moments, be qualified as vices and/or defects of the Products, nor shall the Client be entitled to claim their replacement and/or the reduction of the relevant price as a consequence thereof.

8. MISPRINTS AND PRINTING ERRORS

We are not responsible for any misprint or printing error in catalogs or price lists. All images and sizes are not binding. Modifications are reserved. Design modifications are reserved to technically enhance products.

9. EXCLUSIVE COURT

All disputes arising out of or relating to these General Conditions, any Agreement and/or to the supply of Products shall be exclusively submit ted to and settled by the Court of Vicenza, Italy.
PBA shall in any case be entitled, at its exclusive discretion, to institute

legal proceedings against the Client before the Court of the place where the Client has its registered office.

10. APPLICABLE LAW

These General Conditions of sale and any Agreement shall be governed by Italian Law

Should the Client be a foreign entity or in any case an entity having the registered office or the main place of business abroad, the Contracts related to the supply of the Products shall in any case be regulated by the United Nations Convention on the International Sale of Goods (Wien Convention, April 11, 1980)

11. WAIVER

Failure by PBA to enforce at any time the provisions of these General Conditions shall not be construed as a waiver of such provision or of the right to thereafter enforce each and every provision herein.

12 LANGUAGE

The Client executes these General Conditions in Italian and in English, it being agreed that should any conflict or inconsistency arise among the two versions, the Italian wording shall always prevail