






























MILLWORK AND APPLIANCE PULLS

# MILLWORK AND APPLIANCE PULLS





CODE	MATERIAL	FINISH		.XX	* indicative colors	
GMP.	STAINLESS STEEL AISI 316L	Standard:				
		<b>SATIN</b>	LRV 53	<b>.44</b>		
		<b>BRIGHT</b>	LRV 70	<b>.43</b>		
		Stainless Steel Bright finish has a Satin inner profile				
		<b>POWDER-COATED</b>	Black Ral 9005 Matt	<b>.40</b>		
			White Ral 9010	<b>.31</b>		
			Grey	<b>.32</b>		
			Champagne	<b>.38</b>		
			Bronze	<b>.39</b>		
		<b>POWDER-COATED</b>	Transparent Bright	<b>.99</b>		
Transparent Satin	<b>.99</b>					
Black	<b>.99</b>					
<b>A M C</b>						
On selected items						
STAINLESS STEEL PVD GOLD	<b>SATIN</b>	Black or white burnished steel fixing screws Minimum order quantity 10 pieces		<b>.80</b>		
COPPER PLATED WITHOUT COATING	<b>SEMI-BRIGHT</b>	On selected items		<b>.58</b>		
		Black burnished steel fixing screws				
		Copper plated finish can vary significantly from batch to batch				
STAINLESS STEEL AISI 316L + WOOD		Wenge				
		Ash				
		Mahogany				
		White Oak				
STAINLESS STEEL AISI 316L + LEATHER		Black PF				
		Brown PF				
		Colors on request Minimum order quantity 10 pieces				
2CP. GOH.	STAINLESS STEEL AISI 316L	Standard:				
		<b>SATIN</b>	LRV 53	<b>.44</b>		
		<b>BRIGHT</b>	LRV 70	<b>.43</b>		
		<b>POWDER-COATED</b>	Black Ral 9005 Matt	<b>.40</b>		
			White Ral 9010	<b>.31</b>		
			Grey	<b>.32</b>		
			Champagne	<b>.38</b>		
			Bronze	<b>.39</b>		
		Stainless Steel Powder-Coated colors to match any RAL number are available upon request with an MOQ				
		Screws, grub screws, and plastic parts are not powder coated				
2AT.	ALUMINUM	Standard:				
		<b>ANODIZED SATIN</b>	Silver	<b>.69</b>		
			Bronze	<b>.67</b>		
			Black	<b>.68</b>		
			Champagne	<b>.66</b>		
	On selected items					

EVERYONE MILLWORK  
PULLS

- Stainless Steel AISI 316L
- Stainless Steel PVD Gold
- Copper
- Powder-coated
- Wood
- Leather

page Millwork-Appliance Pulls\_6





APPLIANCE PULLS  
200C

Stainless Steel AISI 316L  
Powder-coated

page Millwork-Appliance Pulls\_19



MILLWORK AND  
APPLIANCE PULLS  
OH COLLECTION

Stainless Steel AISI 316L  
Powder-coated

page Millwork-Appliance Pulls\_20



MILLWORK AND  
APPLIANCE PULLS  
ALUMINUM

Aluminum

page Millwork-Appliance Pulls\_21



LEGEND

page Millwork-Appliance Pulls\_3

TECHNICAL REFERENCES

page Millwork-Appliance Pulls\_22

## EVERYONE MILLWORK PULLS

Stainless Steel AISI 316L

Stainless Steel PVD Gold


Copper

Powder-coated

Wood

Leather





## Design 1

ITEM	A	B
GMP.D01.0005. xx	127 mm 5"	37 mm 1 29/64"
GMP.D01.0006. xx	152,4 mm 6"	37 mm 1 29/64"
GMP.D01.0007. xx	177,8 mm 7"	37 mm 1 29/64"
GMP.D01.0008. xx	203,2 mm 8"	37 mm 1 29/64"
GMP.D01.0009. xx	228,6 mm 9"	37 mm 1 29/64"
GMP.D01.0010. xx	254 mm 10"	37 mm 1 29/64"
GMP.D01.0011. xx	279,4 mm 11"	37 mm 1 29/64"
GMP.D01.0012. xx	304,8 mm 12"	37 mm 1 29/64"

FIXING FOR WOOD PANEL INCLUDED  
(MIN 5/8" - MAX 11/16")

**.XX = FINISH CODE**

**STAINLESS STEEL**

- .43 BRIGHT STAINLESS STEEL (ANSI/BHMA 629 - USD32) \*
- .44 SATIN STAINLESS STEEL (ANSI/BHMA 630 - USD32D)

**STAINLESS STEEL POWDER-COATED**

- .40 BLACK RAL 9005
- .31 WHITE RAL 9010
- .32 GREY
- .38 CHAMPAGNE
- .39 BRONZE

**STAINLESS STEEL POWDER-COATED** AMC

- .99 TRANSPARENT BRIGHT
- .99 TRANSPARENT SATIN
- .99 BLACK

**.58 COPPER PLATED WITHOUT COATING**

SEMI-BRIGHT  
Black burnished steel fixing screws  
Copper plated finish can vary significantly from batch to batch

**.80 STAINLESS STEEL PVD GOLD**

SATIN  
Black or white burnished steel fixing screws  
Minimum order quantity 10 pieces




\* Stainless Steel Bright finish has a Satin inner profile  
Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.

THESE PRODUCTS CONTRIBUTE TO **LEED®** CREDITS

THE MANUFACTURER RESERVES THE RIGHT TO ALTER, IMPROVE AND DISCONTINUE ANY FEATURES OF THE PRODUCT (MAKE CHANGES AND IMPROVEMENTS IN DESIGNS AND DIMENSIONS) WITHOUT NOTICE.

ALL DIMENSIONS IN THE CATALOG DRAWINGS ARE APPROXIMATIONS. REQUEST THE APPROPRIATE TECHNICAL DRAWING BEFORE DOOR PREPARATION AND INSTALLATION.



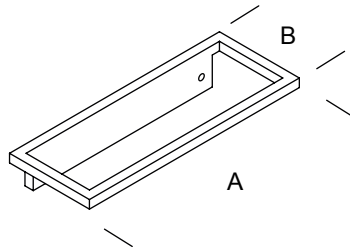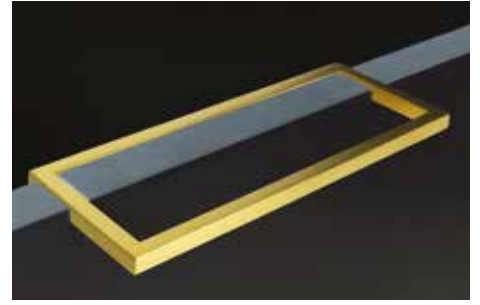

Patent Number D936447

## Design 2

ITEM	A	B
GMP.D02.0005. xx	127 mm 5"	58 mm 2 9/32"
GMP.D02.0006. xx	152,4 mm 6"	58 mm 2 9/32"
GMP.D02.0007. xx	177,8 mm 7"	58 mm 2 9/32"
GMP.D02.0008. xx	203,2 mm 8"	58 mm 2 9/32"
GMP.D02.0009. xx	228,6 mm 9"	58 mm 2 9/32"
GMP.D02.0010. xx	254 mm 10"	58 mm 2 9/32"
GMP.D02.0011. xx	279,4 mm 11"	58 mm 2 9/32"
GMP.D02.0012. xx	304,8 mm 12"	58 mm 2 9/32"

FIXING FOR WOOD PANEL INCLUDED  
(MIN 5/8" - MAX 13/16")

**.XX = FINISH CODE**

**STAINLESS STEEL**

- .43 BRIGHT STAINLESS STEEL (ANSI/BHMA 629 - USD32) \*
- .44 SATIN STAINLESS STEEL (ANSI/BHMA 630 - USD32D)

**STAINLESS STEEL POWDER-COATED**

- .40 BLACK RAL 9005
- .31 WHITE RAL 9010
- .32 GREY
- .38 CHAMPAGNE
- .39 BRONZE

**STAINLESS STEEL POWDER-COATED**

**A M C**

- .99 TRANSPARENT BRIGHT
- .99 TRANSPARENT SATIN
- .99 BLACK

**COPPER PLATED WITHOUT COATING**

- .58 SEMI-BRIGHT
- Black burnished steel fixing screws
- Copper plated finish can vary significantly from batch to batch

**STAINLESS STEEL PVD GOLD**

- .80 SATIN
- Black or white burnished steel fixing screws
- Minimum order quantity 10 pieces

\* Stainless Steel Bright finish has a Satin inner profile

Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.





Hardwood or medium-density fiberboard (MDF) substrates are recommended when Design 2, Design 2R, Design 3, Design 3R and Design 4 pulls are used. Lesser grade materials, such as particle board, could affect connection strength.

THESE PRODUCTS CONTRIBUTE TO LEED® CREDITS

THE MANUFACTURER RESERVES THE RIGHT TO ALTER, IMPROVE AND DISCONTINUE ANY FEATURES OF THE PRODUCT (MAKE CHANGES AND IMPROVEMENTS IN DESIGNS AND DIMENSIONS) WITHOUT NOTICE.

ALL DIMENSIONS IN THE CATALOG DRAWINGS ARE APPROXIMATIONS. REQUEST THE APPROPRIATE TECHNICAL DRAWING BEFORE DOOR PREPARATION AND INSTALLATION.



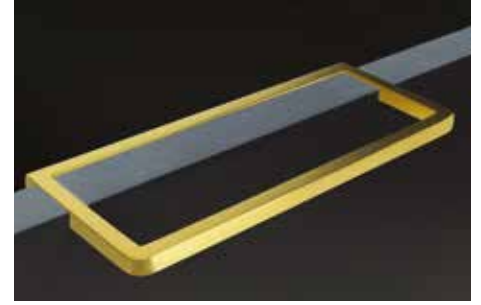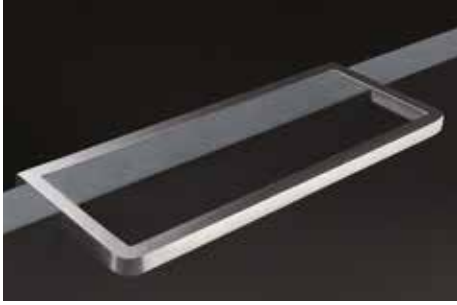

## Design 2R

ITEM	A	B
GMP.D2R.0005. xx	127 mm 5"	58 mm 2 9/32"
GMP.D2R.0006. xx	152,4 mm 6"	58 mm 2 9/32"
GMP.D2R.0007. xx	177,8 mm 7"	58 mm 2 9/32"
GMP.D2R.0008. xx	203,2 mm 8"	58 mm 2 9/32"
GMP.D2R.0009. xx	228,6 mm 9"	58 mm 2 9/32"
GMP.D2R.0010. xx	254 mm 10"	58 mm 2 9/32"
GMP.D2R.0011. xx	279,4 mm 11"	58 mm 2 9/32"
GMP.D2R.0012. xx	304,8 mm 12"	58 mm 2 9/32"

FIXING FOR WOOD PANEL INCLUDED  
(MIN 5/8" - MAX 13/16")

**.XX = FINISH CODE**

**STAINLESS STEEL**

- .43 BRIGHT STAINLESS STEEL (ANSI/BHMA 629 - USD32) \*
- .44 SATIN STAINLESS STEEL (ANSI/BHMA 630 - USD32D)

**STAINLESS STEEL POWDER-COATED**

- .40 BLACK RAL 9005
- .31 WHITE RAL 9010
- .32 GREY
- .38 CHAMPAGNE
- .39 BRONZE

**STAINLESS STEEL POWDER-COATED**

- .99 TRANSPARENT BRIGHT
- .99 TRANSPARENT SATIN
- .99 BLACK



**COPPER PLATED WITHOUT COATING**

- .58 SEMI-BRIGHT
- Black burnished steel fixing screws
- Copper plated finish can vary significantly from batch to batch

**STAINLESS STEEL PVD GOLD**

- .80 SATIN
- Black or white burnished steel fixing screws
- Minimum order quantity 10 pieces

\* Stainless Steel Bright finish has a Satin inner profile

Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.



Hardwood or medium-density fiberboard (MDF) substrates are recommended when Design 2, Design 2R, Design 3, Design 3R and Design 4 pulls are used. Lesser grade materials, such as particle board, could affect connection strength.

THESE PRODUCTS CONTRIBUTE TO **LEED®** CREDITS

THE MANUFACTURER RESERVES THE RIGHT TO ALTER, IMPROVE AND DISCONTINUE ANY FEATURES OF THE PRODUCT (MAKE CHANGES AND IMPROVEMENTS IN DESIGNS AND DIMENSIONS) WITHOUT NOTICE.

ALL DIMENSIONS IN THE CATALOG DRAWINGS ARE APPROXIMATIONS. REQUEST THE APPROPRIATE TECHNICAL DRAWING BEFORE DOOR PREPARATION AND INSTALLATION.



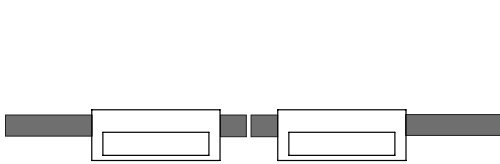

Patent Number D936448

## Design 3

ITEM	A	B
GMP.D03.0005. xx	127 mm 5"	58 mm 2 9/32"
GMP.D03.0006. xx	152,4 mm 6"	58 mm 2 9/32"
GMP.D03.0007. xx	177,8 mm 7"	58 mm 2 9/32"
GMP.D03.0008. xx	203,2 mm 8"	58 mm 2 9/32"
GMP.D03.0009. xx	228,6 mm 9"	58 mm 2 9/32"
GMP.D03.0010. xx	254 mm 10"	58 mm 2 9/32"
GMP.D03.0011. xx	279,4 mm 11"	58 mm 2 9/32"
GMP.D03.0012. xx	304,8 mm 12"	58 mm 2 9/32"

FIXING FOR WOOD PANEL INCLUDED  
(MIN 11/16" - MAX 7/8")

**.XX = FINISH CODE**

**STAINLESS STEEL**

- .43 BRIGHT STAINLESS STEEL (ANSI/BHMA 629 - USD32) \*
- .44 SATIN STAINLESS STEEL (ANSI/BHMA 630 - USD32D)

**STAINLESS STEEL POWDER-COATED**

- .40 BLACK RAL 9005
- .31 WHITE RAL 9010
- .32 GREY
- .38 CHAMPAGNE
- .39 BRONZE

**STAINLESS STEEL POWDER-COATED**

**AMC**

- .99 TRANSPARENT BRIGHT
- .99 TRANSPARENT SATIN
- .99 BLACK

**COPPER PLATED WITHOUT COATING**

- .58 SEMI-BRIGHT
- Black burnished steel fixing screws
- Copper plated finish can vary significantly from batch to batch

**STAINLESS STEEL PVD GOLD**

- .80 SATIN
- Black or white burnished steel fixing screws
- Minimum order quantity 10 pieces

\* Stainless Steel Bright finish has a Satin inner profile




Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.

Hardwood or medium-density fiberboard (MDF) substrates are recommended when Design 2, Design 2R, Design 3, Design 3R and Design 4 pulls are used. Lesser grade materials, such as particle board, could affect connection strength.

THESE PRODUCTS CONTRIBUTE TO LEED® CREDITS

THE MANUFACTURER RESERVES THE RIGHT TO ALTER, IMPROVE AND DISCONTINUE ANY FEATURES OF THE PRODUCT (MAKE CHANGES AND IMPROVEMENTS IN DESIGNS AND DIMENSIONS) WITHOUT NOTICE.

ALL DIMENSIONS IN THE CATALOG DRAWINGS ARE APPROXIMATIONS. REQUEST THE APPROPRIATE TECHNICAL DRAWING BEFORE DOOR PREPARATION AND INSTALLATION.

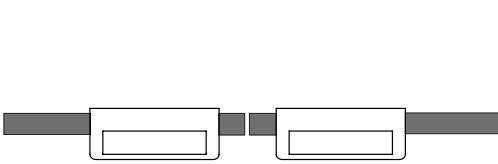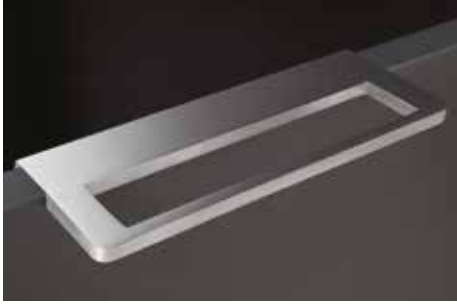

## Design 3R

ITEM	A	B
GMP.D3R.0005. xx	127 mm 5"	58 mm 2 9/32"
GMP.D3R.0006. xx	152,4 mm 6"	58 mm 2 9/32"
GMP.D3R.0007. xx	177,8 mm 7"	58 mm 2 9/32"
GMP.D3R.0008. xx	203,2 mm 8"	58 mm 2 9/32"
GMP.D3R.0009. xx	228,6 mm 9"	58 mm 2 9/32"
GMP.D3R.0010. xx	254 mm 10"	58 mm 2 9/32"
GMP.D3R.0011. xx	279,4 mm 11"	58 mm 2 9/32"
GMP.D3R.0012. xx	304,8 mm 12"	58 mm 2 9/32"

FIXING FOR WOOD PANEL INCLUDED  
(MIN 11/16" - MAX 7/8")

**.XX = FINISH CODE**

**STAINLESS STEEL**

- .43 BRIGHT STAINLESS STEEL (ANSI/BHMA 629 - USD32) \*
- .44 SATIN STAINLESS STEEL (ANSI/BHMA 630 - USD32D)

**STAINLESS STEEL POWDER-COATED**

- .40 BLACK RAL 9005
- .31 WHITE RAL 9010
- .32 GREY
- .38 CHAMPAGNE
- .39 BRONZE

**STAINLESS STEEL POWDER-COATED**

**AMC**

- .99 TRANSPARENT BRIGHT
- .99 TRANSPARENT SATIN
- .99 BLACK

**COPPER PLATED WITHOUT COATING**

- .58 SEMI-BRIGHT
- Black burnished steel fixing screws
- Copper plated finish can vary significantly from batch to batch

**STAINLESS STEEL PVD GOLD**

- .80 SATIN
- Black or white burnished steel fixing screws
- Minimum order quantity 10 pieces

\* Stainless Steel Bright finish has a Satin inner profile

Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.



Hardwood or medium-density fiberboard (MDF) substrates are recommended when Design 2, Design 2R, Design 3, Design 3R and Design 4 pulls are used. Lesser grade materials, such as particle board, could affect connection strength.

THESE PRODUCTS CONTRIBUTE TO **LEED®** CREDITS

THE MANUFACTURER RESERVES THE RIGHT TO ALTER, IMPROVE AND DISCONTINUE ANY FEATURES OF THE PRODUCT (MAKE CHANGES AND IMPROVEMENTS IN DESIGNS AND DIMENSIONS) WITHOUT NOTICE.

ALL DIMENSIONS IN THE CATALOG DRAWINGS ARE APPROXIMATIONS. REQUEST THE APPROPRIATE TECHNICAL DRAWING BEFORE DOOR PREPARATION AND INSTALLATION.





Patent pending: Application Number 29/780,029

## Design 4

ITEM	A	B
GMP.D04.0005. xx	58 mm 2 9/32"	20 mm 25/32"

FIXING FOR WOOD PANEL INCLUDED  
(MIN 11/16" - MAX 13/16")

**.XX = FINISH CODE**

**STAINLESS STEEL**

- .43 BRIGHT STAINLESS STEEL (ANSI/BHMA 629 - USD32) \*
- .44 SATIN STAINLESS STEEL (ANSI/BHMA 630 - USD32D)

**STAINLESS STEEL POWDER-COATED**

- .40 BLACK RAL 9005
- .31 WHITE RAL 9010
- .32 GREY
- .38 CHAMPAGNE
- .39 BRONZE

**STAINLESS STEEL POWDER-COATED**

AMC

- .99 TRANSPARENT BRIGHT
- .99 TRANSPARENT SATIN
- .99 BLACK

**COPPER PLATED WITHOUT COATING**

- .58 SEMI-BRIGHT
- Black burnished steel fixing screws
- Copper plated finish can vary significantly from batch to batch

**STAINLESS STEEL PVD GOLD**

- .80 SATIN
- Black or white burnished steel fixing screws
- Minimum order quantity 10 pieces

\* Stainless Steel Bright finish has a Satin inner profile

Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.

Hardwood or medium-density fiberboard (MDF) substrates are recommended when Design 2, Design 2R, Design 3, Design 3R and Design 4 pulls are used. Lesser grade materials, such as particle board, could affect connection strength.

THESE PRODUCTS CONTRIBUTE TO LEED® CREDITS

THE MANUFACTURER RESERVES THE RIGHT TO ALTER, IMPROVE AND DISCONTINUE ANY FEATURES OF THE PRODUCT (MAKE CHANGES AND IMPROVEMENTS IN DESIGNS AND DIMENSIONS) WITHOUT NOTICE.

ALL DIMENSIONS IN THE CATALOG DRAWINGS ARE APPROXIMATIONS. REQUEST THE APPROPRIATE TECHNICAL DRAWING BEFORE DOOR PREPARATION AND INSTALLATION.







STAINLESS STEEL SATIN AND WHITE OAK AS PICTURED



STAINLESS STEEL PVD GOLD SATIN AND WENGE AS PICTURED



Patent Number D936449

## Design 5

### WOOD



Ash



Mahogany



Wenge



White Oak

ITEM	A	B	ITEM	A	B	ITEM	A	B	ITEM	A	B
GMP.D05.0A05.xx	127 mm 5"	44 mm 1 47/64"	GMP.D05.0M05.xx	127 mm 5"	44 mm 1 47/64"	GMP.D05.0W05.xx	127 mm 5"	44 mm 1 47/64"	GMP.D05.0B05.xx	127 mm 5"	44 mm 1 47/64"
GMP.D05.0A06.xx	152,4 mm 6"	44 mm 1 47/64"	GMP.D05.0M06.xx	152,4 mm 6"	44 mm 1 47/64"	GMP.D05.0W06.xx	152,4 mm 6"	44 mm 1 47/64"	GMP.D05.0B06.xx	152,4 mm 6"	44 mm 1 47/64"
GMP.D05.0A07.xx	177,8 mm 7"	44 mm 1 47/64"	GMP.D05.0M07.xx	177,8 mm 7"	44 mm 1 47/64"	GMP.D05.0W07.xx	177,8 mm 7"	44 mm 1 47/64"	GMP.D05.0B07.xx	177,8 mm 7"	44 mm 1 47/64"
GMP.D05.0A08.xx	203,2 mm 8"	44 mm 1 47/64"	GMP.D05.0M08.xx	203,2 mm 8"	44 mm 1 47/64"	GMP.D05.0W08.xx	203,2 mm 8"	44 mm 1 47/64"	GMP.D05.0B08.xx	203,2 mm 8"	44 mm 1 47/64"
GMP.D05.0A09.xx	228,6 mm 9"	44 mm 1 47/64"	GMP.D05.0M09.xx	228,6 mm 9"	44 mm 1 47/64"	GMP.D05.0W09.xx	228,6 mm 9"	44 mm 1 47/64"	GMP.D05.0B09.xx	228,6 mm 9"	44 mm 1 47/64"
GMP.D05.0A10.xx	254 mm 10"	44 mm 1 47/64"	GMP.D05.0M10.xx	254 mm 10"	44 mm 1 47/64"	GMP.D05.0W10.xx	254 mm 10"	44 mm 1 47/64"	GMP.D05.0B10.xx	254 mm 10"	44 mm 1 47/64"
GMP.D05.0A11.xx	279,4 mm 11"	44 mm 1 47/64"	GMP.D05.0M11.xx	279,4 mm 11"	44 mm 1 47/64"	GMP.D05.0W11.xx	279,4 mm 11"	44 mm 1 47/64"	GMP.D05.0B11.xx	279,4 mm 11"	44 mm 1 47/64"
GMP.D05.0A12.xx	304,8 mm 12"	44 mm 1 47/64"	GMP.D05.0M12.xx	304,8 mm 12"	44 mm 1 47/64"	GMP.D05.0W12.xx	304,8 mm 12"	44 mm 1 47/64"	GMP.D05.0B12.xx	304,8 mm 12"	44 mm 1 47/64"

FIXING FOR WOOD PANEL INCLUDED  
(MIN 1/2" - MAX 13/16")

### .XX = FINISH CODE

#### STAINLESS STEEL

- .43 BRIGHT STAINLESS STEEL (ANSI/BHMA 629 - USD32) \*
- .44 SATIN STAINLESS STEEL (ANSI/BHMA 630 - USD32D)

#### STAINLESS STEEL POWDER-COATED

- .40 BLACK RAL 9005
- .31 WHITE RAL 9010
- .32 GREY
- .38 CHAMPAGNE
- .39 BRONZE

#### STAINLESS STEEL PVD GOLD

- .80 SATIN
- Black or white burnished steel fixing screws
- Minimum order quantity 10 pieces

\* Stainless Steel Bright finish has a Satin inner profile

Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.

Wood is a natural material that varies in color, grain pattern and overall appearance and texture



THESE PRODUCTS CONTRIBUTE TO LEED® CREDITS

THE MANUFACTURER RESERVES THE RIGHT TO ALTER, IMPROVE AND DISCONTINUE ANY FEATURES OF THE PRODUCT (MAKE CHANGES AND IMPROVEMENTS IN DESIGNS AND DIMENSIONS) WITHOUT NOTICE.



ALL DIMENSIONS IN THE CATALOG DRAWINGS ARE APPROXIMATIONS. REQUEST THE APPROPRIATE TECHNICAL DRAWING BEFORE DOOR PREPARATION AND INSTALLATION.



STAINLESS STEEL SATIN AND WHITE OAK AS PICTURED



STAINLESS STEEL PVD GOLD SATIN AND WENGE AS PICTURED

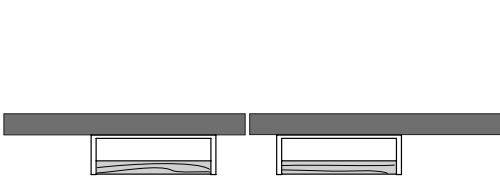

Patent Number D939920

## Design 6

### WOOD



Ash



Mahogany



Wenge



White Oak

ITEM	A	B	ITEM	A	B	ITEM	A	B	ITEM	A	B
GMP.D06.0A05.xx	127 mm	48 mm	GMP.D06.0M05.xx	127 mm	48 mm	GMP.D06.0W05.xx	127 mm	48 mm	GMP.D06.0B05.xx	127 mm	48 mm
	5"	1 57/64"		5"	1 57/64"		5"	1 57/64"		5"	1 57/64"
GMP.D06.0A06.xx	152,4 mm	48 mm	GMP.D06.0M06.xx	152,4 mm	48 mm	GMP.D06.0W06.xx	152,4 mm	48 mm	GMP.D06.0B06.xx	152,4 mm	48 mm
	6"	1 57/64"		6"	1 57/64"		6"	1 57/64"		6"	1 57/64"
GMP.D06.0A07.xx	177,8 mm	48 mm	GMP.D06.0M07.xx	177,8 mm	48 mm	GMP.D06.0W07.xx	177,8 mm	48 mm	GMP.D06.0B07.xx	177,8 mm	48 mm
	7"	1 57/64"		7"	1 57/64"		7"	1 57/64"		7"	1 57/64"
GMP.D06.0A08.xx	203,2 mm	48 mm	GMP.D06.0M08.xx	203,2 mm	48 mm	GMP.D06.0W08.xx	203,2 mm	48 mm	GMP.D06.0B08.xx	203,2 mm	48 mm
	8"	1 57/64"		8"	1 57/64"		8"	1 57/64"		8"	1 57/64"
GMP.D06.0A09.xx	228,6 mm	48 mm	GMP.D06.0M09.xx	228,6 mm	48 mm	GMP.D06.0W09.xx	228,6 mm	48 mm	GMP.D06.0B09.xx	228,6 mm	48 mm
	9"	1 57/64"		9"	1 57/64"		9"	1 57/64"		9"	1 57/64"
GMP.D06.0A10.xx	254 mm	48 mm	GMP.D06.0M10.xx	254 mm	48 mm	GMP.D06.0W10.xx	254 mm	48 mm	GMP.D06.0B10.xx	254 mm	48 mm
	10"	1 57/64"		10"	1 57/64"		10"	1 57/64"		10"	1 57/64"
GMP.D06.0A11.xx	279,4 mm	48 mm	GMP.D06.0M11.xx	279,4 mm	48 mm	GMP.D06.0W11.xx	279,4 mm	48 mm	GMP.D06.0B11.xx	279,4 mm	48 mm
	11"	1 57/64"		11"	1 57/64"		11"	1 57/64"		11"	1 57/64"
GMP.D06.0A12.xx	304,8 mm	48 mm	GMP.D06.0M12.xx	304,8 mm	48 mm	GMP.D06.0W12.xx	304,8 mm	48 mm	GMP.D06.0B12.xx	304,8 mm	48 mm
	12"	1 57/64"		12"	1 57/64"		12"	1 57/64"		12"	1 57/64"

FIXING FOR WOOD PANEL INCLUDED  
(MIN 5/8" - MAX 1 1/16")

### .XX = FINISH CODE

#### STAINLESS STEEL

- .43 BRIGHT STAINLESS STEEL (ANSI/BHMA 629 - USD32) \*
- .44 SATIN STAINLESS STEEL (ANSI/BHMA 630 - USD32D)

#### STAINLESS STEEL POWDER-COATED

- .40 BLACK RAL 9005
- .31 WHITE RAL 9010
- .32 GREY
- .38 CHAMPAGNE
- .39 BRONZE

#### STAINLESS STEEL PVD GOLD

- .80 SATIN
- Black or white burnished steel fixing screws
- Minimum order quantity 10 pieces

\* Stainless Steel Bright finish has a Satin inner profile

Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.


Wood is a natural material that varies in color, grain pattern and overall appearance and texture



THESE PRODUCTS CONTRIBUTE TO LEED® CREDITS

THE MANUFACTURER RESERVES THE RIGHT TO ALTER, IMPROVE AND DISCONTINUE ANY FEATURES OF THE PRODUCT (MAKE CHANGES AND IMPROVEMENTS IN DESIGNS AND DIMENSIONS) WITHOUT NOTICE.

ALL DIMENSIONS IN THE CATALOG DRAWINGS ARE APPROXIMATIONS. REQUEST THE APPROPRIATE TECHNICAL DRAWING BEFORE DOOR PREPARATION AND INSTALLATION.



## Design 7

ITEM	A	B
<b>GMP.D07.0005. xx</b>	127 mm 5"	37 mm 1 29/64"
<b>GMP.D07.0006. xx</b>	152,4 mm 6"	37 mm 1 29/64"
<b>GMP.D07.0007. xx</b>	177,8 mm 7"	37 mm 1 29/64"
<b>GMP.D07.0008. xx</b>	203,2 mm 8"	37 mm 1 29/64"
<b>GMP.D07.0009. xx</b>	228,6 mm 9"	37 mm 1 29/64"

FIXING FOR WOOD PANEL INCLUDED  
(MIN 1/2" - MAX 13/16")

**.XX = FINISH CODE**

**STAINLESS STEEL**

- .43 BRIGHT STAINLESS STEEL (ANSI/BHMA 629 - USD32) \*
- .44 SATIN STAINLESS STEEL (ANSI/BHMA 630 - USD32D)

**STAINLESS STEEL POWDER-COATED**

- .40 BLACK RAL 9005
- .31 WHITE RAL 9010
- .32 GREY
- .38 CHAMPAGNE
- .39 BRONZE

**STAINLESS STEEL POWDER-COATED**

**AMC**

- .99 TRANSPARENT BRIGHT
- .99 TRANSPARENT SATIN
- .99 BLACK

**COPPER PLATED WITHOUT COATING**

- .58 SEMI-BRIGHT
- Black burnished steel fixing screws
- Copper plated finish can vary significantly from batch to batch

**STAINLESS STEEL PVD GOLD**

- .80 SATIN
- Black or white burnished steel fixing screws
- Minimum order quantity 10 pieces

\* Stainless Steel Bright finish has a Satin inner profile

Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.

THESE PRODUCTS CONTRIBUTE TO **LEED®** CREDITS

THE MANUFACTURER RESERVES THE RIGHT TO ALTER, IMPROVE AND DISCONTINUE ANY FEATURES OF THE PRODUCT (MAKE CHANGES AND IMPROVEMENTS IN DESIGNS AND DIMENSIONS) WITHOUT NOTICE.

ALL DIMENSIONS IN THE CATALOG DRAWINGS ARE APPROXIMATIONS. REQUEST THE APPROPRIATE TECHNICAL DRAWING BEFORE DOOR PREPARATION AND INSTALLATION.







STAINLESS STEEL SATIN AND BLACK LEATHER AS PICTURED



STAINLESS STEEL PVD GOLD SATIN AND BLACK LEATHER AS PICTURED



## Design 8

### LEATHER



Black



Brown



Colors on request - Minimum order quantity 10 pieces

ITEM	A	B	ITEM	A	B	ITEM	A	B
GMP.D08.BL05.xx	127 mm 5"	44 mm 1 47/64"	GMP.D08.BR05.xx	127 mm 5"	44 mm 1 47/64"	GMP.D08.9L05.xx	127 mm 5"	44 mm 1 47/64"
GMP.D08.BL06.xx	152,4 mm 6"	44 mm 1 47/64"	GMP.D08.BR06.xx	152,4 mm 6"	44 mm 1 47/64"	GMP.D08.9L06.xx	152,4 mm 6"	44 mm 1 47/64"
GMP.D08.BL07.xx	177,8 mm 7"	44 mm 1 47/64"	GMP.D08.BR07.xx	177,8 mm 7"	44 mm 1 47/64"	GMP.D08.9L07.xx	177,8 mm 7"	44 mm 1 47/64"
GMP.D08.BL08.xx	203,2 mm 8"	44 mm 1 47/64"	GMP.D08.BR08.xx	203,2 mm 8"	44 mm 1 47/64"	GMP.D08.9L08.xx	203,2 mm 8"	44 mm 1 47/64"
GMP.D08.BL09.xx	228,6 mm 9"	44 mm 1 47/64"	GMP.D08.BR09.xx	228,6 mm 9"	44 mm 1 47/64"	GMP.D08.9L09.xx	228,6 mm 9"	44 mm 1 47/64"
GMP.D08.BL10.xx	254 mm 10"	44 mm 1 47/64"	GMP.D08.BR10.xx	254 mm 10"	44 mm 1 47/64"	GMP.D08.9L10.xx	254 mm 10"	44 mm 1 47/64"
GMP.D08.BL11.xx	279,4 mm 11"	44 mm 1 47/64"	GMP.D08.BR11.xx	279,4 mm 11"	44 mm 1 47/64"	GMP.D08.9L11.xx	279,4 mm 11"	44 mm 1 47/64"
GMP.D08.BL12.xx	304,8 mm 12"	44 mm 1 47/64"	GMP.D08.BR12.xx	304,8 mm 12"	44 mm 1 47/64"	GMP.D08.9L12.xx	304,8 mm 12"	44 mm 1 47/64"

FIXING FOR WOOD PANEL INCLUDED  
(MIN 1/2" - MAX 13/16")

### .XX = FINISH CODE

#### STAINLESS STEEL

- .43 BRIGHT STAINLESS STEEL (ANSI/BHMA 629 - USD32) \*
- .44 SATIN STAINLESS STEEL (ANSI/BHMA 630 - USD32D)

#### STAINLESS STEEL POWDER-COATED

- .40 BLACK RAL 9005
- .31 WHITE RAL 9010
- .32 GREY
- .38 CHAMPAGNE
- .39 BRONZE

#### STAINLESS STEEL PVD GOLD

- .80 SATIN
- Black or white burnished steel fixing screws
- Minimum order quantity 10 pieces

\* Stainless Steel Bright finish has a Satin inner profile

Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.

Genuine leather is a natural material that may exhibit marks, lines, wrinkles, and color variation.



THESE PRODUCTS CONTRIBUTE TO LEED® CREDITS

THE MANUFACTURER RESERVES THE RIGHT TO ALTER, IMPROVE AND DISCONTINUE ANY FEATURES OF THE PRODUCT (MAKE CHANGES AND IMPROVEMENTS IN DESIGNS AND DIMENSIONS) WITHOUT NOTICE.


ALL DIMENSIONS IN THE CATALOG DRAWINGS ARE APPROXIMATIONS. REQUEST THE APPROPRIATE TECHNICAL DRAWING BEFORE DOOR PREPARATION AND INSTALLATION.



STAINLESS STEEL SATIN AND BLACK LEATHER AS PICTURED



STAINLESS STEEL PVD GOLD SATIN AND BLACK LEATHER AS PICTURED

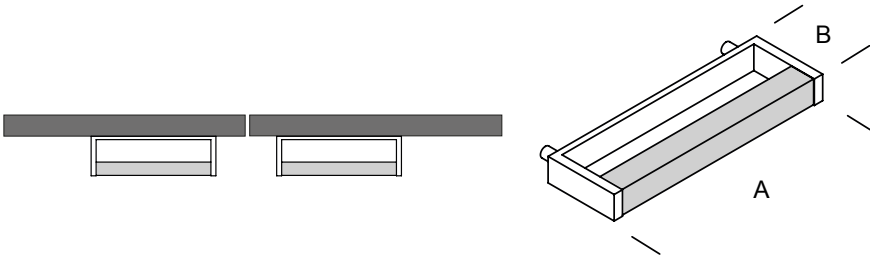

## Design 9

### LEATHER



Black



Brown



Colors on request - Minimum order quantity 10 pieces

ITEM	A	B	ITEM	A	B	ITEM	A	B
GMP.D09.BL05.xx	127 mm 5"	48 mm 1 57/64"	GMP.D09.BR05.xx	127 mm 5"	48 mm 1 57/64"	GMP.D09.9L05.xx	127 mm 5"	48 mm 1 57/64"
GMP.D09.BL06.xx	152,4 mm 6"	48 mm 1 57/64"	GMP.D09.BR06.xx	152,4 mm 6"	48 mm 1 57/64"	GMP.D09.9L06.xx	152,4 mm 6"	48 mm 1 57/64"
GMP.D09.BL07.xx	177,8 mm 7"	48 mm 1 57/64"	GMP.D09.BR07.xx	177,8 mm 7"	48 mm 1 57/64"	GMP.D09.9L07.xx	177,8 mm 7"	48 mm 1 57/64"
GMP.D09.BL08.xx	203,2 mm 8"	48 mm 1 57/64"	GMP.D09.BR08.xx	203,2 mm 8"	48 mm 1 57/64"	GMP.D09.9L08.xx	203,2 mm 8"	48 mm 1 57/64"
GMP.D09.BL09.xx	228,6 mm 9"	48 mm 1 57/64"	GMP.D09.BR09.xx	228,6 mm 9"	48 mm 1 57/64"	GMP.D09.9L09.xx	228,6 mm 9"	48 mm 1 57/64"
GMP.D09.BL10.xx	254 mm 10"	48 mm 1 57/64"	GMP.D09.BR10.xx	254 mm 10"	48 mm 1 57/64"	GMP.D09.9L10.xx	254 mm 10"	48 mm 1 57/64"
GMP.D09.BL11.xx	279,4 mm 11"	48 mm 1 57/64"	GMP.D09.BR11.xx	279,4 mm 11"	48 mm 1 57/64"	GMP.D09.9L11.xx	279,4 mm 11"	48 mm 1 57/64"
GMP.D09.BL12.xx	304,8 mm 12"	48 mm 1 57/64"	GMP.D09.BR12.xx	304,8 mm 12"	48 mm 1 57/64"	GMP.D09.9L12.xx	304,8 mm 12"	48 mm 1 57/64"

FIXING FOR WOOD PANEL INCLUDED  
(MIN 5/8" - MAX 11/16")

### .XX = FINISH CODE

#### STAINLESS STEEL

- .43 BRIGHT STAINLESS STEEL (ANSI/BHMA 629 - USD32) \*
- .44 SATIN STAINLESS STEEL (ANSI/BHMA 630 - USD32D)

#### STAINLESS STEEL POWDER-COATED

- .40 BLACK RAL 9005
- .31 WHITE RAL 9010
- .32 GREY
- .38 CHAMPAGNE
- .39 BRONZE

#### STAINLESS STEEL PVD GOLD

- .80 SATIN
- Black or white burnished steel fixing screws
- Minimum order quantity 10 pieces

\* Stainless Steel Bright finish has a Satin inner profile

Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.

Genuine leather is a natural material that may exhibit marks, lines, wrinkles, and color variation.



THESE PRODUCTS CONTRIBUTE TO LEED® CREDITS

THE MANUFACTURER RESERVES THE RIGHT TO ALTER, IMPROVE AND DISCONTINUE ANY FEATURES OF THE PRODUCT (MAKE CHANGES AND IMPROVEMENTS IN DESIGNS AND DIMENSIONS) WITHOUT NOTICE.


ALL DIMENSIONS IN THE CATALOG DRAWINGS ARE APPROXIMATIONS. REQUEST THE APPROPRIATE TECHNICAL DRAWING BEFORE DOOR PREPARATION AND INSTALLATION.

MILLWORK AND APPLIANCE PULLS

Stainless Steel AISI 316L  
Aluminum  
Powder-coated



APPLIANCE PULL

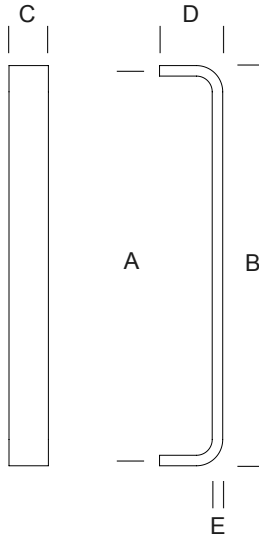

ITEM	A	B	C	D	E
2CP.101.0012 .xx	296,80 mm 11 11/16"	304,80 mm 12"	30 mm 1 3/16"	48 mm 1 5/7/64"	8 mm 5/16"
2CP.101.0018 .xx	449,20 mm 17 11/16"	457,20 mm 18"	30 mm 1 3/16"	48 mm 1 5/7/64"	8 mm 5/16"
2CP.101.0024 .xx	601,60 mm 23 11/16"	609,60 mm 24"	30 mm 1 3/16"	48 mm 1 5/7/64"	8 mm 5/16"

FIXING FOR WOOD PANEL INCLUDED  
(MIN 1/2" - MAX 3/4")

.XX = FINISH CODE

STAINLESS STEEL

- .44 SATIN STAINLESS STEEL (ANSI/BHMA 630 - USD32D)
- .43 BRIGHT STAINLESS STEEL (ANSI/BHMA 629 - USD32)

STAINLESS STEEL POWDER-COATED ON REQUEST

- .40 BLACK RAL 9005
- .31 WHITE RAL 9010
- .32 GREY
- .38 CHAMPAGNE
- .39 BRONZE

Stainless Steel Powder-Coated colors to match any RAL number are available upon request with an MOQ.  
(Screws, grub screws, and plastic parts are not powder coated.)




THESE PRODUCTS CONTRIBUTE TO LEED® CREDITS


THE MANUFACTURER RESERVES THE RIGHT TO ALTER, IMPROVE AND DISCONTINUE ANY FEATURES OF THE PRODUCT (MAKE CHANGES AND IMPROVEMENTS IN DESIGNS AND DIMENSIONS) WITHOUT NOTICE.

ALL DIMENSIONS IN THE CATALOG DRAWINGS ARE APPROXIMATIONS. REQUEST THE APPROPRIATE TECHNICAL DRAWING BEFORE DOOR PREPARATION AND INSTALLATION.

APPLIANCE PULL

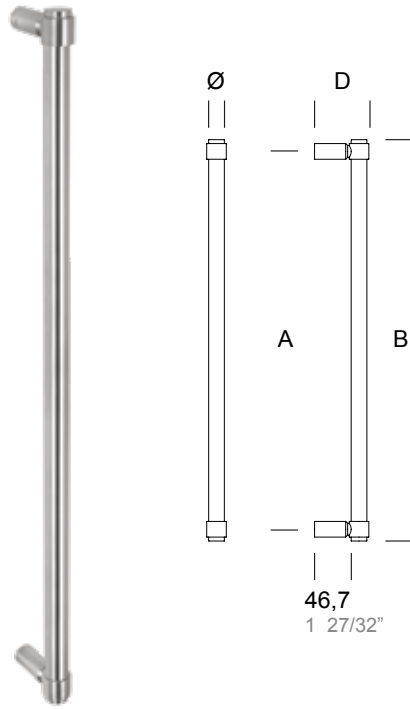

MILLWORK PULL

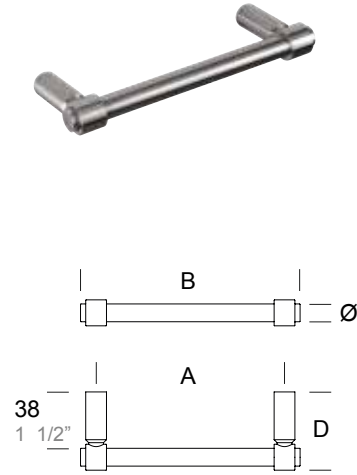

ITEM	A	B	Ø	D
GOH.301.0024 .xx	579,6 mm 22 13/16"	609,6 mm 24"	20 mm 25/32"	69 mm 2 23/32"
GOH.301.0030 .xx	732 mm 28 13/16"	762 mm 30"	20 mm 25/32"	69 mm 2 23/32"
GOH.301.0036 .xx	884,4 mm 34 13/16"	914,4 mm 36"	20 mm 25/32"	69 mm 2 23/32"
GOH.301.0048 .xx	1189,2 mm 46 13/16"	1219,2 mm 48"	20 mm 25/32"	69 mm 2 23/32"
GOH.301.9999 .xx	custom	custom	20 mm 25/32"	69 mm 2 23/32"

B MAX 1219,2 mm (48")

FIXING D  
page Pulls\_123

ITEM	A	B	Ø	D
GOH.201.0005 .xx	127 mm 5"	148 mm 5 53/64"	12 mm 15/32"	52,75 mm 2 5/64"
GOH.201.0006 .xx	152,4 mm 6"	173,4 mm 6 53/64"	12 mm 15/32"	52,75 mm 2 5/64"
GOH.201.0007 .xx	177,8 mm 7"	198,8 mm 7 53/64"	12 mm 15/32"	52,75 mm 2 5/64"
GOH.201.0008 .xx	203,2 mm 8"	224,2 mm 8 53/64"	12 mm 15/32"	52,75 mm 2 5/64"
GOH.201.0009 .xx	228,6 mm 9"	249,6 mm 9 53/64"	12 mm 15/32"	52,75 mm 2 5/64"
GOH.201.0010 .xx	254 mm 10"	275 mm 10 53/64"	12 mm 15/32"	52,75 mm 2 5/64"
GOH.201.0011 .xx	279,4 mm 11"	300,4 mm 11 53/64"	12 mm 15/32"	52,75 mm 2 5/64"
GOH.201.0012 .xx	304,8 mm 12"	325,8 mm 12 53/64"	12 mm 15/32"	52,75 mm 2 5/64"
GOH.201.0018 .xx	457,2 mm 18"	478,2 mm 18 53/64"	12 mm 15/32"	52,75 mm 2 5/64"

FIXING FOR WOOD PANEL INCLUDED  
(MIN 11/16" - MAX 7/8")

.XX = FINISH CODE

STAINLESS STEEL

- .44 SATIN STAINLESS STEEL (ANSI/BHMA 630 - USD32D)
- .43 BRIGHT STAINLESS STEEL (ANSI/BHMA 629 - USD32)

STAINLESS STEEL POWDER-COATED ON REQUEST

- .40 BLACK RAL 9005
- .31 WHITE RAL 9010
- .32 GREY
- .38 CHAMPAGNE
- .39 BRONZE

Stainless Steel Powder-Coated colors to match any RAL number are available upon request with an MOQ.  
(Screws, grub screws, and plastic parts are not powder coated.)


THESE PRODUCTS CONTRIBUTE TO LEED® CREDITS

THE MANUFACTURER RESERVES THE RIGHT TO ALTER, IMPROVE AND DISCONTINUE ANY FEATURES OF THE PRODUCT (MAKE CHANGES AND IMPROVEMENTS IN DESIGNS AND DIMENSIONS) WITHOUT NOTICE.


ALL DIMENSIONS IN THE CATALOG DRAWINGS ARE APPROXIMATIONS. REQUEST THE APPROPRIATE TECHNICAL DRAWING BEFORE DOOR PREPARATION AND INSTALLATION.



MILLWORK PULL / APPLIANCE PULL



MILLWORK PULL




ITEM	A	B	Ø	D
2AT.003.0022 .xx	224 mm 8 13/16"	254 mm 10"	20 mm 25/32"	45,40 mm 1 25/32"
2AT.003.0027 .xx	274,80 mm 10 13/16"	304,80 mm 12"	20 mm 25/32"	45,40 mm 1 25/32"
2AT.003.0043 .xx	427,20 mm 16 13/16"	457,20 mm 18"	20 mm 25/32"	45,40 mm 1 25/32"
2AT.003.0048 .xx	478 mm 18 13/16"	508 mm 20"	20 mm 25/32"	45,40 mm 1 25/32"
2AT.003.0058 .xx	579,60 mm 22 13/16"	609,60 mm 24"	20 mm 25/32"	45,40 mm 1 25/32"
2AT.003.0073 .xx	732 mm 28 13/16"	762 mm 30"	20 mm 25/32"	45,40 mm 1 25/32"
2AT.003.0088 .xx	884,40 mm 34 13/16"	914,40 mm 36"	20 mm 25/32"	45,40 mm 1 25/32"
2AT.003.9999 .xx	custom	custom	20 mm 25/32"	45,40 mm 1 25/32"

Max lenght 36" - 914,40 mm

Custom size available with minimum order quantity

FIXING FOR WOOD PANEL INCLUDED  
(MIN 1/2" - MAX 3/4")




ITEM	A	B	Ø	D
2AT.004.0019 .xx	188,20 mm 7 13/32"	203,20 mm 8"	10 mm 25/64"	35,40 mm 1 25/64"
2AT.004.0029 .xx	289,80 mm 11 13/32"	304,80 mm 12"	10 mm 25/64"	35,40 mm 1 25/64"
2AT.004.0044 .xx	442,20 mm 17 13/32"	457,20 mm 18"	10 mm 25/64"	35,40 mm 1 25/64"

Max lenght 18" - 457,20 mm

Custom size available with minimum order quantity

FIXING FOR WOOD PANEL INCLUDED  
(MIN 1/2" - MAX 3/4")



.XX = FINISH CODE

- SATIN ANODIZED ALUMINUM
- .67 BRONZE
- .68 BLACK
- .69 SILVER
- .66 CHAMPAGNE

CUSTOM ANODIZED POLISHED FINISH NOT AVAILABLE.  
OTHER CUSTOM FINISH FEASIBILITY TO BE VALIDATED BEFORE ORDER.

THESE MODELS SHALL NOT BE USED AS DOOR PULLS.  
ONLY FOR USE ON APPLIANCE DOORS OR CABINET DOORS

DIFFERENCES IN THE FINISHING OF (DIFFERENT) COMPONENTS ARE DUE TO THE DIFFERENT PRODUCTION METHODS. THESE VARIATIONS ARE NOT CONSIDERED DEFECTS AND ARE A NATURAL RESULT OF THE FINISHING PROCESS.

THESE PRODUCTS CONTRIBUTE TO LEED CREDITS

THE MANUFACTURER RESERVES THE RIGHT TO ALTER, IMPROVE AND DISCONTINUE ANY FEATURES OF THE PRODUCT (MAKE CHANGES AND IMPROVEMENTS IN DESIGNS AND DIMENSIONS) WITHOUT NOTICE.

ALL DIMENSIONS IN THE CATALOG DRAWINGS ARE APPROXIMATIONS. REQUEST THE APPROPRIATE TECHNICAL DRAWING BEFORE DOOR PREPARATION AND INSTALLATION.



Declare.

## TECHNICAL INFORMATION

**PBA ANTIMICROBIAL COATING (AMC)**



THE USE OF PRODUCTS WITH ANTIMICROBIAL SURFACES IS BECOMING A MORE IMPORTANT WAY TO CREATE CLEANER, MORE HYGIENIC ENVIRONMENTS WITH REDUCED OPPORTUNITIES FOR THE PROLIFERATION AND TRANSMISSION OF GERMS. THE **PBA ANTIMICROBIAL COATING (AMC)** SURFACE FINISH IS A VALID ANSWER TO THIS BINDING NEED.



THE **PBA ANTIMICROBIAL COATING (AMC)** SURFACE FINISHING CONTAINS SPECIAL ADDITIVES THAT MAKE THE SURFACE PROTECTED FROM BACTERIA AND MICROORGANISMS. THE TESTS SHOW THAT ON UNTREATED SURFACES THE MICROBES AND BACTERIA CAN EASILY PROLIFERATE WHILE ON THE TREATED SURFACES THE BACTERIAL PROLIFERATION IS PRACTICALLY ZEROED.


THE FOUNDATION FOR SUCCESSFULLY FIGHTING GERM GROWTH CONSISTS OF A THREE ACTION MECHANISMS: BLOCKAGE OF PRIMARY CELL METABOLISM, STOPPAGE OF CELLULAR RESPIRATION, PREVENTION OF CELL DIVISION.

SURFACES WITH **PBA ANTIMICROBIAL COATING (AMC)** HAVE BEEN TESTED TO BE ACTIVE AGAINST GRAM-POSITIVE (STAPHYLOCOCCUS AUREUS - MRSA, BACILLUS SUBTILIS, STREPTOCOCCUS DAECALIS, AND OTHERS) AND GRAM-NEGATIVE BACTERIA (ESCHERICHIA COLI - ESBL, LEGIONELLA PNEUMOPHILA, PSEUDOMONAS AERUGINOSA AND OTHERS).

TRIED AND TESTED EFFICACY DEMONSTRATES THAT **PBA ANTIMICROBIAL COATING (AMC)** REDUCES MULTI-RESISTANT GERMS BY 99.99%.

**PBA ANTIMICROBIAL COATING (AMC)** IS RECOMMENDED FOR ALL THE HYGENE-SENSITIVE AREAS SUCH AS HOSPITALS AND RETIREMENT HOME, OFFICES AND RETAIL AND GENERALLY FOR PUBLIC BUILDINGS AND HOTELS.

ALL PBA PRODUCTS IN STAINLESS STEEL AND ALUMINUM CAN BE TREATED WITH **PBA ANTIMICROBIAL COATING (AMC)**.

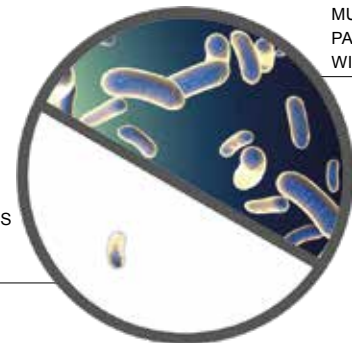


MULTI-RESISTANT PATHOGENS DEVELOP WITHOUT PBA AMC

PBA AMC REDUCES PATHOGENS BY 99.99%


TRIED AND TESTED EFFICACY REDUCES MULTI-RESISTANT PATHOGENS BY 99.99%. (EFFECT OF ANTI-BACTERIAL ACTIVITY ON STAINLESS STEEL SURFACES.)

**AVAILABLE SIZES FOR EACH MODEL**


Design 1




Design 2




Design 2R




Design 3




Design 3R




Design 5




Design 6




Design 7\*



Design 8



Design 9



**SIZES**

304,8 mm  
12 in



279,4 mm  
11 in



254 mm  
10 in



228,6 mm  
9 in



203,2 mm  
8 in



177,8 mm  
7 in



152,4 mm  
6 in



127 mm  
5 in



\* Not available 10 in, 11 in, 12 in sizes

Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.

