


























































MILLWORK AND APPLIANCE PULLS



IT

CODE	MATERIALE	FINITURA	.XX	* colori indicativi			
GMP.	ACCIAIO INOX AISI 316L	Di produzione: SATINATO	LRV 53	.44			
		LUCIDO	LRV 70	.43			
		VERNICIATO	Nero 9005 Opaco	.40			
			Bianco 9010	.31			
			Grigio	.32			
			Champagne	.38			
		Bronzo	.39				
		VERNICIATO A M C	Lucido trasparente	.99			
			Satinato trasparente	.99			
			Nero	.99			
Su articoli selezionati							
	ACCIAIO INOX PVD ORO	SATINATO Viti di fissaggio in acciaio brunito nero o bianco Ordine minimo 10 pezzi	.80				
	RAME PLACCATO SENZA RIVESTIMENTO	SEMI-LUCIDO su articoli selezionati Viti di fissaggio in acciaio brunito nero La finitura rame placcato può variare significativamente da lotto a lotto	.58				
	ACCIAIO INOX AISI 316L + LEGNO	Wenge Frassino Mogano Rovere sbiancato		   			
	ACCIAIO INOX AISI 316L + PELLE	Nero PF Marrone PF Colori a richiesta Ordine minimo 10 pezzi		 			
2CP. GOH.	ACCIAIO INOX AISI 316L	Di produzione: SATINATO	LRV 53	.44			
		LUCIDO	LRV 70	.43			
		VERNICIATO	Nero 9005 Opaco	.40			
			Bianco 9010	.31			
			Grigio	.32			
			Champagne	.38			
		Bronzo	.39				
		Colori a richiesta da abbinare con tutti i RAL Viti, grani e componenti in nylon non verniciati					
			ALLUMINIO	Di produzione: ANODIZZATO SATINATO	Argento Bronzo Nero Champagne Su articoli selezionati	.69 .67 .68 .66	   

EN

MATERIAL	FINISH	.XX	* indicative colors		
STAINLESS STEEL AISI 316L	Standard: SATIN	LRV 53	.44		
	BRIGHT	LRV 70	.43		
	POWDER-COATED	Black Ral 9005 Matt	.40		
		White Ral 9010	.31		
		Grey	.32		
		Champagne	.38		
	Bronze	.39			
	POWDER-COATED A M C	Transparent Bright	.99		
		Transparent Satin	.99		
		Black	.99		
On selected items					
STAINLESS STEEL PVD GOLD	SATIN Black or white burnished steel fixing screws Minimum order quantity 10 pieces	.80			
COPPER PLATED WITHOUT COATING	SEMI-BRIGHT On selected items Black burnished steel fixing screws Copper plated finish can vary significantly from batch to batch	.58			
STAINLESS STEEL AISI 316L + WOOD	Wenge Ash Mahogany White Oak		   		
STAINLESS STEEL AISI 316L + LEATHER	Black PF Brown PF Colors on request Minimum order quantity 10 pieces		 		
STAINLESS STEEL AISI 316L	Standard: SATIN	LRV 53	.44		
	BRIGHT	LRV 70	.43		
	POWDER-COATED	Black Ral 9005 Matt	.40		
		White Ral 9010	.31		
		Grey	.32		
		Champagne	.38		
	Bronze	.39			
	Stainless Steel Powder-Coated colors to match any RAL number are available upon request with an MOQ Screws, grub screws, and plastic parts are not powder coated				
	ALUMINUM	Standard: ANODIZED SATIN	Silver Bronze Black Champagne On selected items	.69 .67 .68 .66	   

**MILLWORK PULLS
DESIGN 1**

Stainless Steel AISI 316L
Stainless Steel PVD Gold
Copper
Powder-coated


Page 185



**MILLWORK PULLS
DESIGN 2 | 2R**

Stainless Steel AISI 316L
Stainless Steel PVD Gold
Copper
Powder-coated

Page 186



**MILLWORK PULLS
DESIGN 3 | 3R**

Stainless Steel AISI 316L
Stainless Steel PVD Gold
Copper
Powder-coated

Page 188



**MILLWORK PULLS
DESIGN 4**

Stainless Steel AISI 316L
Stainless Steel PVD Gold
Copper
Powder-coated

Page 190



**MILLWORK PULLS
DESIGN 5 | 6**

Stainless Steel AISI 316L
Stainless Steel PVD Gold
Copper
Powder-coated
Wood

Page 192



**MILLWORK PULLS
DESIGN 7**

Stainless Steel AISI 316L
Stainless Steel PVD Gold
Copper
Powder-coated

Page 193



**MILLWORK PULLS
DESIGN 8 | 9**

Stainless Steel AISI 316L
Stainless Steel PVD Gold
Copper
Powder-coated
Leather

Page 194



**APPLIANCE PULLS
200C**

Stainless Steel AISI 316L
Powder-coated

Page 197



**MILLWORK AND
APPLIANCE PULLS
OH COLLECTION**

Stainless Steel AISI 316L
Powder-coated

Page 198



**MILLWORK AND
APPLIANCE PULLS
ALUMINUM**

Aluminum

Page 199



**INFORMAZIONI TECNICHE
TECHNICAL REFERENCES**

Page 200

EVERYONE MILLWORK PULLS

Stainless Steel AISI 316L

Stainless Steel PVD Gold


Copper

Powder-coated

Wood

Leather





Design 1

ART.	A	B
GMP.D01.0005. xx	127 mm 5"	37 mm 1 29/64"
GMP.D01.0006. xx	152,4 mm 6"	37 mm 1 29/64"
GMP.D01.0007. xx	177,8 mm 7"	37 mm 1 29/64"
GMP.D01.0008. xx	203,2 mm 8"	37 mm 1 29/64"
GMP.D01.0009. xx	228,6 mm 9"	37 mm 1 29/64"
GMP.D01.0010. xx	254 mm 10"	37 mm 1 29/64"
GMP.D01.0011. xx	279,4 mm 11"	37 mm 1 29/64"
GMP.D01.0012. xx	304,8 mm 12"	37 mm 1 29/64"

FISSAGGIO PER PANNELLO IN LEGNO INCLUSO
FIXING FOR WOOD PANEL INCLUDED
MIN 16 mm (5/8") - MAX 18 mm (11/16")

.XX = FINITURA FINISH FINITION AFWERKING page 181	ACCIAIO INOX STAINLESS STEEL	.44	.43*	
	ACCIAIO INOX VERNICIATO STAINLESS STEEL POWDER COATED	.40	.31	.32 .38 .39

.99 STAINLESS STEEL POWDER-COATED ON REQUEST **AMC**
.99 TRANSPARENT BRIGHT
.99 TRANSPARENT SATIN
.99 BLACK

.58 COPPER PLATED WITHOUT COATING
SEMI-BRIGHT
Black burnished steel fixing screws
Copper plated finish can vary significantly from batch to batch

.80 STAINLESS STEEL PVD GOLD
SATIN
Black or white burnished steel fixing screws
Minimum order quantity 10 pieces

* Stainless Steel Bright finish has a Satin inner profile
Everyone Millwork Pulls shall not be used on appliance doors
when the appliance is firmly connected to the door.

THESE PRODUCTS CONTRIBUTE TO **LEED®** CREDITS





pba si riserva il diritto di modificare, migliorare e sospendere qualsiasi caratteristica del prodotto (modifiche e miglioramenti nei disegni tecnici e nelle dimensioni) senza preavviso.

The manufacturer reserves the right to alter, improve and discontinue any features of the product (make changes and improvements in designs and dimensions) without notice.

I disegni riportati a catalogo sono indicativi degli ingombri.
Richiedere il disegno tecnico prima di effettuare le lavorazioni per l'installazione.

All dimensions in the catalog drawings are approximations.
Request the appropriate technical drawing before door preparation and installation.



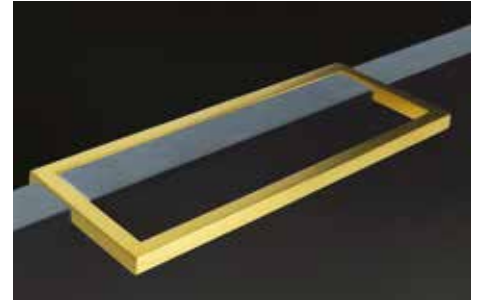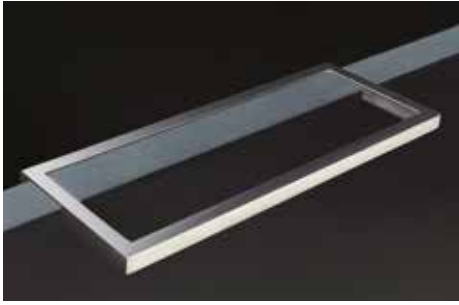

Patent Number D936447

Design 2

ART.	A	B
GMP.D02.0005. xx	127 mm 5"	58 mm 2 9/32"
GMP.D02.0006. xx	152,4 mm 6"	58 mm 2 9/32"
GMP.D02.0007. xx	177,8 mm 7"	58 mm 2 9/32"
GMP.D02.0008. xx	203,2 mm 8"	58 mm 2 9/32"
GMP.D02.0009. xx	228,6 mm 9"	58 mm 2 9/32"
GMP.D02.0010. xx	254 mm 10"	58 mm 2 9/32"
GMP.D02.0011. xx	279,4 mm 11"	58 mm 2 9/32"
GMP.D02.0012. xx	304,8 mm 12"	58 mm 2 9/32"

FISSAGGIO PER PANNELLO IN LEGNO INCLUSO
FIXING FOR WOOD PANEL INCLUDED
MIN 16 mm (5/8") - MAX 21 mm (13/16")

XX = FINITURA FINISH FINITION AFWERKING page 181	ACCIAIO INOX STAINLESS STEEL	.44	.43*	
	ACCIAIO INOX VERNICIATO STAINLESS STEEL POWDER COATED	.40	.31	.32 .38 .39

- STAINLESS STEEL POWDER-COATED ON REQUEST **AMC**
- .99 TRANSPARENT BRIGHT
- .99 TRANSPARENT SATIN
- .99 BLACK
- .58 COPPER PLATED WITHOUT COATING
SEMI-BRIGHT
Black burnished steel fixing screws
Copper plated finish can vary significantly from batch to batch
- .80 STAINLESS STEEL PVD GOLD
SATIN
Black or white burnished steel fixing screws
Minimum order quantity 10 pieces

* Stainless Steel Bright finish has a Satin inner profile
Everyone Millwork Pulls shall not be used on appliance doors
when the appliance is firmly connected to the door.

Hardwood or medium-density fiberboard (MDF) substrates are recommended when
Design 2, Design 2R, Design 3, Design 3R and Design 4 pulls are used.
Lesser grade materials, such as particle board, could affect connection strength.

THESE PRODUCTS CONTRIBUTE TO LEED® CREDITS





pba si riserva il diritto di modificare, migliorare e sospendere qualsiasi caratteristica del prodotto
(modifiche e miglioramenti nei disegni tecnici e nelle dimensioni) senza preavviso.

The manufacturer reserves the right to alter, improve and discontinue any features of the product
(make changes and improvements in designs and dimensions) without notice.

I disegni riportati a catalogo sono indicativi degli ingombri.
Richiedere il disegno tecnico prima di effettuare le lavorazioni per l'installazione.

All dimensions in the catalog drawings are approximations.
Request the appropriate technical drawing before door preparation and installation.



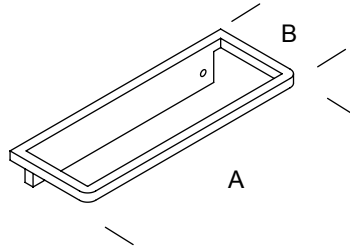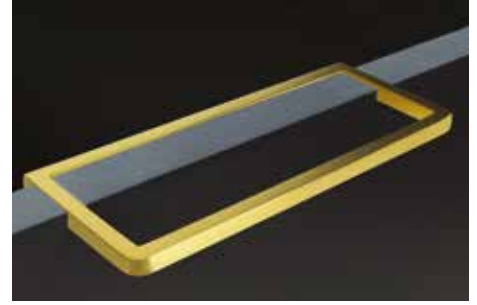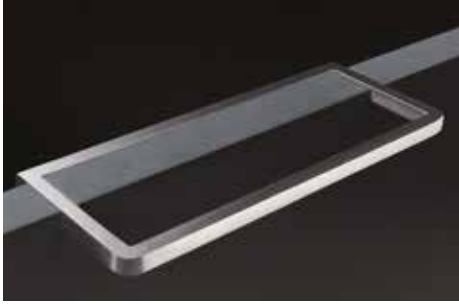

Design 2R

ART.	A	B
GMP.D2R.0005. xx	127 mm 5"	58 mm 2 9/32"
GMP.D2R.0006. xx	152,4 mm 6"	58 mm 2 9/32"
GMP.D2R.0007. xx	177,8 mm 7"	58 mm 2 9/32"
GMP.D2R.0008. xx	203,2 mm 8"	58 mm 2 9/32"
GMP.D2R.0009. xx	228,6 mm 9"	58 mm 2 9/32"
GMP.D2R.0010. xx	254 mm 10"	58 mm 2 9/32"
GMP.D2R.0011. xx	279,4 mm 11"	58 mm 2 9/32"
GMP.D2R.0012. xx	304,8 mm 12"	58 mm 2 9/32"

FISSAGGIO PER PANNELLO IN LEGNO INCLUSO
FIXING FOR WOOD PANEL INCLUDED
MIN 16 mm (5/8") - MAX 21 mm (13/16")

XX = FINITURA FINISH FINITION AFWERKING page 181	ACCIAIO INOX STAINLESS STEEL	.44	.43*	
	ACCIAIO INOX VERNICIATO STAINLESS STEEL POWDER COATED	.40	.31	.32 .38 .39

STAINLESS STEEL POWDER-COATED ON REQUEST **AMC**
.99 TRANSPARENT BRIGHT
.99 TRANSPARENT SATIN
.99 BLACK

.58 COPPER PLATED WITHOUT COATING
SEMI-BRIGHT
Black burnished steel fixing screws
Copper plated finish can vary significantly from batch to batch

.80 STAINLESS STEEL PVD GOLD
SATIN
Black or white burnished steel fixing screws
Minimum order quantity 10 pieces

* Stainless Steel Bright finish has a Satin inner profile

Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.

Hardwood or medium-density fiberboard (MDF) substrates are recommended when Design 2, Design 2R, Design 3, Design 3R and Design 4 pulls are used. Lesser grade materials, such as particle board, could affect connection strength.

THESE PRODUCTS CONTRIBUTE TO LEED® CREDITS

pba si riserva il diritto di modificare, migliorare e sospendere qualsiasi caratteristica del prodotto (modifiche e miglioramenti nei disegni tecnici e nelle dimensioni) senza preavviso.

The manufacturer reserves the right to alter, improve and discontinue any features of the product (make changes and improvements in designs and dimensions) without notice.



I disegni riportati a catalogo sono indicativi degli ingombri. Richiedere il disegno tecnico prima di effettuare le lavorazioni per l'installazione.

All dimensions in the catalog drawings are approximations. Request the appropriate technical drawing before door preparation and installation.



THE INTERNATIONAL EPD SYSTEM



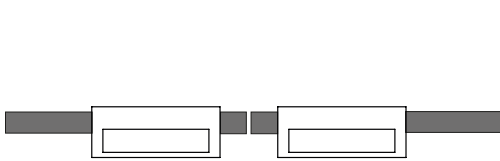

Patent Number D936448

Design 3

ART.	A	B
GMP.D03.0005. xx	127 mm 5"	58 mm 2 9/32"
GMP.D03.0006. xx	152,4 mm 6"	58 mm 2 9/32"
GMP.D03.0007. xx	177,8 mm 7"	58 mm 2 9/32"
GMP.D03.0008. xx	203,2 mm 8"	58 mm 2 9/32"
GMP.D03.0009. xx	228,6 mm 9"	58 mm 2 9/32"
GMP.D03.0010. xx	254 mm 10"	58 mm 2 9/32"
GMP.D03.0011. xx	279,4 mm 11"	58 mm 2 9/32"
GMP.D03.0012. xx	304,8 mm 12"	58 mm 2 9/32"

FISSAGGIO PER PANNELLO IN LEGNO INCLUSO
FIXING FOR WOOD PANEL INCLUDED
MIN 18 mm (11/16") - MAX 22 mm (7/8")

XX = FINITURA FINISH FINITION AFWERKING page 181	ACCIAIO INOX STAINLESS STEEL	.44	.43*	
	ACCIAIO INOX VERNICIATO STAINLESS STEEL POWDER COATED	.40	.31	.32 .38 .39

STAINLESS STEEL POWDER-COATED ON REQUEST **AMC**
.99 TRANSPARENT BRIGHT
.99 TRANSPARENT SATIN
.99 BLACK

.58 COPPER PLATED WITHOUT COATING
SEMI-BRIGHT
Black burnished steel fixing screws
Copper plated finish can vary significantly from batch to batch

.80 STAINLESS STEEL PVD GOLD
SATIN
Black or white burnished steel fixing screws
Minimum order quantity 10 pieces

* Stainless Steel Bright finish has a Satin inner profile

Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.

Hardwood or medium-density fiberboard (MDF) substrates are recommended when Design 2, Design 2R, Design 3, Design 3R and Design 4 pulls are used. Lesser grade materials, such as particle board, could affect connection strength.

THESE PRODUCTS CONTRIBUTE TO LEED® CREDITS




pba si riserva il diritto di modificare, migliorare e sospendere qualsiasi caratteristica del prodotto (modifiche e miglioramenti nei disegni tecnici e nelle dimensioni) senza preavviso.

The manufacturer reserves the right to alter, improve and discontinue any features of the product (make changes and improvements in designs and dimensions) without notice.

I disegni riportati a catalogo sono indicativi degli ingombri. Richiedere il disegno tecnico prima di effettuare le lavorazioni per l'installazione.

All dimensions in the catalog drawings are approximations. Request the appropriate technical drawing before preparation and installation.



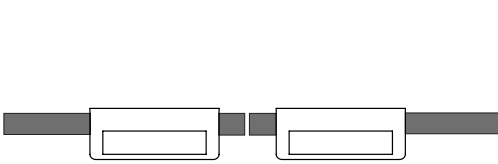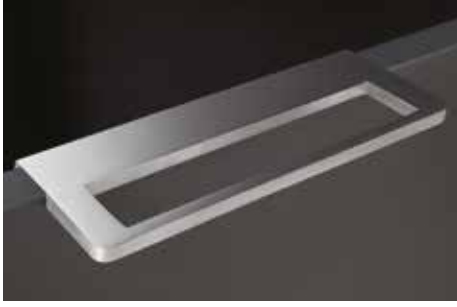

Design 3R

ART.	A	B
GMP.D3R.0005. xx	127 mm 5"	58 mm 2 9/32"
GMP.D3R.0006. xx	152,4 mm 6"	58 mm 2 9/32"
GMP.D3R.0007. xx	177,8 mm 7"	58 mm 2 9/32"
GMP.D3R.0008. xx	203,2 mm 8"	58 mm 2 9/32"
GMP.D3R.0009. xx	228,6 mm 9"	58 mm 2 9/32"
GMP.D3R.0010. xx	254 mm 10"	58 mm 2 9/32"
GMP.D3R.0011. xx	279,4 mm 11"	58 mm 2 9/32"
GMP.D3R.0012. xx	304,8 mm 12"	58 mm 2 9/32"

FISSAGGIO PER PANNELLO IN LEGNO INCLUSO
FIXING FOR WOOD PANEL INCLUDED
MIN 18 mm (11/16") - MAX 22 mm (7/8")

XX = FINITURA FINISH FINITION AFWERKING page 181	ACCIAIO INOX STAINLESS STEEL	.44	.43*	
	ACCIAIO INOX VERNICIATO STAINLESS STEEL POWDER COATED	.40	.31	.32 .38 .39

STAINLESS STEEL POWDER-COATED ON REQUEST **AMC**
.99 TRANSPARENT BRIGHT
.99 TRANSPARENT SATIN
.99 BLACK

.58 COPPER PLATED WITHOUT COATING
SEMI-BRIGHT
Black burnished steel fixing screws
Copper plated finish can vary significantly from batch to batch

.80 STAINLESS STEEL PVD GOLD
SATIN
Black or white burnished steel fixing screws
Minimum order quantity 10 pieces

* Stainless Steel Bright finish has a Satin inner profile

Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.

Hardwood or medium-density fiberboard (MDF) substrates are recommended when Design 2, Design 2R, Design 3, Design 3R and Design 4 pulls are used. Lesser grade materials, such as particle board, could affect connection strength.

THESE PRODUCTS CONTRIBUTE TO LEED® CREDITS

pba si riserva il diritto di modificare, migliorare e sospendere qualsiasi caratteristica del prodotto (modifiche e miglioramenti nei disegni tecnici e nelle dimensioni) senza preavviso.

The manufacturer reserves the right to alter, improve and discontinue any features of the product (make changes and improvements in designs and dimensions) without notice.



I disegni riportati a catalogo sono indicativi degli ingombri. Richiedere il disegno tecnico prima di effettuare le lavorazioni per l'installazione.

All dimensions in the catalog drawings are approximations. Request the appropriate technical drawing before door preparation and installation.



THE INTERNATIONAL EPD SYSTEM





Patent pending: Application Number 29/780,029

Design 4

ART.	A	B
GMP.D04.0005. xx	58 mm 2 9/32"	20 mm 25/32"

FISSAGGIO PER PANNELLO IN LEGNO INCLUSO
FIXING FOR WOOD PANEL INCLUDED
MIN 18 mm (11/16") - MAX 21 mm (13/16")

XX = FINITURA FINISH FINITION AFWERKING page 181	ACCIAIO INOX STAINLESS STEEL	.44	.43*	
	ACCIAIO INOX VERNICIATO STAINLESS STEEL POWDER COATED	.40	.31	.32 .38 .39

STAINLESS STEEL POWDER-COATED ON REQUEST **AMC**
 .99 TRANSPARENT BRIGHT
 .99 TRANSPARENT SATIN
 .99 BLACK

.58 COPPER PLATED WITHOUT COATING
 SEMI-BRIGHT
 Black burnished steel fixing screws
 Copper plated finish can vary significantly from batch to batch

.80 STAINLESS STEEL PVD GOLD
 SATIN
 Black or white burnished steel fixing screws
 Minimum order quantity 10 pieces

* Stainless Steel Bright finish has a Satin inner profile

Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.

Hardwood or medium-density fiberboard (MDF) substrates are recommended when Design 2, Design 2R, Design 3, Design 3R and Design 4 pulls are used. Lesser grade materials, such as particle board, could affect connection strength.

THESE PRODUCTS CONTRIBUTE TO LEED® CREDITS

pba si riserva il diritto di modificare, migliorare e sospendere qualsiasi caratteristica del prodotto (modifiche e miglioramenti nei disegni tecnici e nelle dimensioni) senza preavviso.

The manufacturer reserves the right to alter, improve and discontinue any features of the product (make changes and improvements in designs and dimensions) without notice.

I disegni riportati a catalogo sono indicativi degli ingombri. Richiedere il disegno tecnico prima di effettuare le lavorazioni per l'installazione.

All dimensions in the catalog drawings are approximations. Request the appropriate technical drawing before door preparation and installation.







STAINLESS STEEL SATIN AND WHITE OAK AS PICTURED



STAINLESS STEEL PVD GOLD SATIN AND WENGE AS PICTURED



Patent Number D936449

Design 5

WOOD



Ash



Mahogany



Wenge



White Oak

ART.	A	B	ART.	A	B	ART.	A	B	ART.	A	B
GMP.D05.0A05. xx	127 mm 5" 1 47/64"	44 mm 1 47/64"	GMP.D05.0M05. xx	127 mm 5" 1 47/64"	44 mm 1 47/64"	GMP.D05.0W05. xx	127 mm 5" 1 47/64"	44 mm 1 47/64"	GMP.D05.0B05. xx	127 mm 5" 1 47/64"	44 mm 1 47/64"
GMP.D05.0A06. xx	152,4 mm 6" 1 47/64"	44 mm 1 47/64"	GMP.D05.0M06. xx	152,4 mm 6" 1 47/64"	44 mm 1 47/64"	GMP.D05.0W06. xx	152,4 mm 6" 1 47/64"	44 mm 1 47/64"	GMP.D05.0B06. xx	152,4 mm 6" 1 47/64"	44 mm 1 47/64"
GMP.D05.0A07. xx	177,8 mm 7" 1 47/64"	44 mm 1 47/64"	GMP.D05.0M07. xx	177,8 mm 7" 1 47/64"	44 mm 1 47/64"	GMP.D05.0W07. xx	177,8 mm 7" 1 47/64"	44 mm 1 47/64"	GMP.D05.0B07. xx	177,8 mm 7" 1 47/64"	44 mm 1 47/64"
GMP.D05.0A08. xx	203,2 mm 8" 1 47/64"	44 mm 1 47/64"	GMP.D05.0M08. xx	203,2 mm 8" 1 47/64"	44 mm 1 47/64"	GMP.D05.0W08. xx	203,2 mm 8" 1 47/64"	44 mm 1 47/64"	GMP.D05.0B08. xx	203,2 mm 8" 1 47/64"	44 mm 1 47/64"
GMP.D05.0A09. xx	228,6 mm 9" 1 47/64"	44 mm 1 47/64"	GMP.D05.0M09. xx	228,6 mm 9" 1 47/64"	44 mm 1 47/64"	GMP.D05.0W09. xx	228,6 mm 9" 1 47/64"	44 mm 1 47/64"	GMP.D05.0B09. xx	228,6 mm 9" 1 47/64"	44 mm 1 47/64"
GMP.D05.0A10. xx	254 mm 10" 1 47/64"	44 mm 1 47/64"	GMP.D05.0M10. xx	254 mm 10" 1 47/64"	44 mm 1 47/64"	GMP.D05.0W10. xx	254 mm 10" 1 47/64"	44 mm 1 47/64"	GMP.D05.0B10. xx	254 mm 10" 1 47/64"	44 mm 1 47/64"
GMP.D05.0A11. xx	279,4 mm 11" 1 47/64"	44 mm 1 47/64"	GMP.D05.0M11. xx	279,4 mm 11" 1 47/64"	44 mm 1 47/64"	GMP.D05.0W11. xx	279,4 mm 11" 1 47/64"	44 mm 1 47/64"	GMP.D05.0B11. xx	279,4 mm 11" 1 47/64"	44 mm 1 47/64"
GMP.D05.0A12. xx	304,8 mm 12" 1 47/64"	44 mm 1 47/64"	GMP.D05.0M12. xx	304,8 mm 12" 1 47/64"	44 mm 1 47/64"	GMP.D05.0W12. xx	304,8 mm 12" 1 47/64"	44 mm 1 47/64"	GMP.D05.0B12. xx	304,8 mm 12" 1 47/64"	44 mm 1 47/64"

FISSAGGIO PER PANNELLO IN LEGNO INCLUSO
FIXING FOR WOOD PANEL INCLUDED
MIN 13 mm (1/2") - MAX 21 mm (13/16")

XX = FINITURA
FINISH
FINITION
AFWERKING
page 181

ACCIAIO INOX STAINLESS STEEL	.44	.43*	
ACCIAIO INOX VERNICIATO STAINLESS STEEL POWDER COATED	.40	.31	.32 .38 .39



.80 STAINLESS STEEL PVD GOLD
SATIN
Black or white burnished steel fixing screws
Minimum order quantity 10 pieces

* Stainless Steel Bright finish has a Satin inner profile

Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.

Wood is a natural material that varies in color, grain pattern and overall appearance and texture

THESE PRODUCTS CONTRIBUTE TO LEED® CREDITS

pba si riserva il diritto di modificare, migliorare e sospendere qualsiasi caratteristica del prodotto (modifiche e miglioramenti nei disegni tecnici e nelle dimensioni) senza preavviso.

The manufacturer reserves the right to alter, improve and discontinue any features of the product (make changes and improvements in designs and dimensions) without notice.

I disegni riportati a catalogo sono indicativi degli ingombri.
Richiedere il disegno tecnico prima di effettuare le lavorazioni per l'installazione.



All dimensions in the catalog drawings are approximations.
Request the appropriate technical drawing before door preparation and installation.



STAINLESS STEEL SATIN AND WHITE OAK AS PICTURED



STAINLESS STEEL PVD GOLD SATIN AND WENGE AS PICTURED



Patent Number D939920

Design 6

WOOD



Ash



Mahogany



Wenge



White Oak

ART.	A	B	ART.	A	B	ART.	A	B	ART.	A	B
GMP.D06.0A05.xx	127 mm	48 mm	GMP.D06.0M05.xx	127 mm	48 mm	GMP.D06.0W05.xx	127 mm	48 mm	GMP.D06.0B05.xx	127 mm	48 mm
	5"	1 57/64"		5"	1 57/64"		5"	1 57/64"		5"	1 57/64"
GMP.D06.0A06.xx	152,4 mm	48 mm	GMP.D06.0M06.xx	152,4 mm	48 mm	GMP.D06.0W06.xx	152,4 mm	48 mm	GMP.D06.0B06.xx	152,4 mm	48 mm
	6"	1 57/64"		6"	1 57/64"		6"	1 57/64"		6"	1 57/64"
GMP.D06.0A07.xx	177,8 mm	48 mm	GMP.D06.0M07.xx	177,8 mm	48 mm	GMP.D06.0W07.xx	177,8 mm	48 mm	GMP.D06.0B07.xx	177,8 mm	48 mm
	7"	1 57/64"		7"	1 57/64"		7"	1 57/64"		7"	1 57/64"
GMP.D06.0A08.xx	203,2 mm	48 mm	GMP.D06.0M08.xx	203,2 mm	48 mm	GMP.D06.0W08.xx	203,2 mm	48 mm	GMP.D06.0B08.xx	203,2 mm	48 mm
	8"	1 57/64"		8"	1 57/64"		8"	1 57/64"		8"	1 57/64"
GMP.D06.0A09.xx	228,6 mm	48 mm	GMP.D06.0M09.xx	228,6 mm	48 mm	GMP.D06.0W09.xx	228,6 mm	48 mm	GMP.D06.0B09.xx	228,6 mm	48 mm
	9"	1 57/64"		9"	1 57/64"		9"	1 57/64"		9"	1 57/64"
GMP.D06.0A10.xx	254 mm	48 mm	GMP.D06.0M10.xx	254 mm	48 mm	GMP.D06.0W10.xx	254 mm	48 mm	GMP.D06.0B10.xx	254 mm	48 mm
	10"	1 57/64"		10"	1 57/64"		10"	1 57/64"		10"	1 57/64"
GMP.D06.0A11.xx	279,4 mm	48 mm	GMP.D06.0M11.xx	279,4 mm	48 mm	GMP.D06.0W11.xx	279,4 mm	48 mm	GMP.D06.0B11.xx	279,4 mm	48 mm
	11"	1 57/64"		11"	1 57/64"		11"	1 57/64"		11"	1 57/64"
GMP.D06.0A12.xx	304,8 mm	48 mm	GMP.D06.0M12.xx	304,8 mm	48 mm	GMP.D06.0W12.xx	304,8 mm	48 mm	GMP.D06.0B12.xx	304,8 mm	48 mm
	12"	1 57/64"		12"	1 57/64"		12"	1 57/64"		12"	1 57/64"

FISSAGGIO PER PANNELLO IN LEGNO INCLUSO
FIXING FOR WOOD PANEL INCLUDED
MIN 16 mm (5/8") - MAX 18mm (11/16")

XX = FINITURA
FINISH
FINITION
AFWERKING
page 181

ACCIAIO INOX STAINLESS STEEL	.44	.43*	
ACCIAIO INOX VERNICIATO STAINLESS STEEL POWDER COATED	.40	.31	.32 .38 .39



.80 STAINLESS STEEL PVD GOLD
SATIN
Black or white burnished steel fixing screws
Minimum order quantity 10 pieces

* Stainless Steel Bright finish has a Satin inner profile

Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.

Wood is a natural material that varies in color, grain pattern and overall appearance and texture


THESE PRODUCTS CONTRIBUTE TO LEED® CREDITS

pba si riserva il diritto di modificare, migliorare e sospendere qualsiasi caratteristica del prodotto (modifiche e miglioramenti nei disegni tecnici e nelle dimensioni) senza preavviso.

The manufacturer reserves the right to alter, improve and discontinue any features of the product (make changes and improvements in designs and dimensions) without notice.

I disegni riportati a catalogo sono indicativi degli ingombri. Richiedere il disegno tecnico prima di effettuare le lavorazioni per l'installazione.

All dimensions in the catalog drawings are approximations. Request the appropriate technical drawing before door preparation and installation.



Design 7

ART.	A	B
GMP.D07.0005. xx	127 mm 5"	37 mm 1 29/64"
GMP.D07.0006. xx	152,4 mm 6"	37 mm 1 29/64"
GMP.D07.0007. xx	177,8 mm 7"	37 mm 1 29/64"
GMP.D07.0008. xx	203,2 mm 8"	37 mm 1 29/64"
GMP.D07.0009. xx	228,6 mm 9"	37 mm 1 29/64"

FISSAGGIO PER PANNELLO IN LEGNO INCLUSO
FIXING FOR WOOD PANEL INCLUDED
MIN 13 mm (1/2") - MAX 21 mm (13/16")

XX = FINITURA FINISH FINITION AFWERKING page 181	ACCIAIO INOX STAINLESS STEEL	.44	.43*
	ACCIAIO INOX VERNICIATO STAINLESS STEEL POWDER COATED	.40	.31 .32 .38 .39

- STAINLESS STEEL POWDER-COATED ON REQUEST **AMC**
- .99 TRANSPARENT BRIGHT
 - .99 TRANSPARENT SATIN
 - .99 BLACK
 - .58 COPPER PLATED WITHOUT COATING
SEMI-BRIGHT
Black burnished steel fixing screws
Copper plated finish can vary significantly from batch to batch
 - .80 STAINLESS STEEL PVD GOLD
SATIN
Black or white burnished steel fixing screws
Minimum order quantity 10 pieces

* Stainless Steel Bright finish has a Satin inner profile
Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.

THESE PRODUCTS CONTRIBUTE TO **LEED®** CREDITS


pba si riserva il diritto di modificare, migliorare e sospendere qualsiasi caratteristica del prodotto (modifiche e miglioramenti nei disegni tecnici e nelle dimensioni) senza preavviso.
The manufacturer reserves the right to alter, improve and discontinue any features of the product (make changes and improvements in designs and dimensions) without notice.

I disegni riportati a catalogo sono indicativi degli ingombri.
Richiedere il disegno tecnico prima di effettuare le lavorazioni per l'installazione.
All dimensions in the catalog drawings are approximations.
Request the appropriate technical drawing before door preparation and installation.







STAINLESS STEEL SATIN AND BLACK LEATHER AS PICTURED

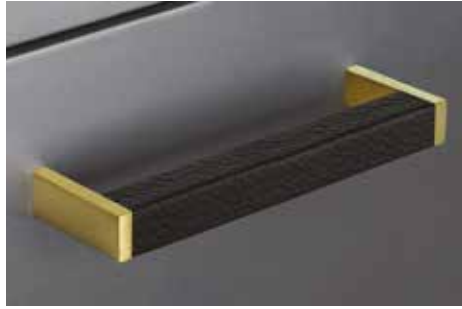

STAINLESS STEEL PVD GOLD SATIN AND BLACK LEATHER AS PICTURED



Design 8

LEATHER



Black



Brown



Colors on request - Minimum order quantity 10 pieces

ART.	A	B	ART.	A	B	ART.	A	B
GMP.D08.BL05. xx	127 mm 5"	44 mm 1 47/64"	GMP.D08.BR05. xx	127 mm 5"	44 mm 1 47/64"	GMP.D08.9L05. xx	127 mm 5"	44 mm 1 47/64"
GMP.D08.BL06. xx	152,4 mm 6"	44 mm 1 47/64"	GMP.D08.BR06. xx	152,4 mm 6"	44 mm 1 47/64"	GMP.D08.9L06. xx	152,4 mm 6"	44 mm 1 47/64"
GMP.D08.BL07. xx	177,8 mm 7"	44 mm 1 47/64"	GMP.D08.BR07. xx	177,8 mm 7"	44 mm 1 47/64"	GMP.D08.9L07. xx	177,8 mm 7"	44 mm 1 47/64"
GMP.D08.BL08. xx	203,2 mm 8"	44 mm 1 47/64"	GMP.D08.BR08. xx	203,2 mm 8"	44 mm 1 47/64"	GMP.D08.9L08. xx	203,2 mm 8"	44 mm 1 47/64"
GMP.D08.BL09. xx	228,6 mm 9"	44 mm 1 47/64"	GMP.D08.BR09. xx	228,6 mm 9"	44 mm 1 47/64"	GMP.D08.9L09. xx	228,6 mm 9"	44 mm 1 47/64"
GMP.D08.BL10. xx	254 mm 10"	44 mm 1 47/64"	GMP.D08.BR10. xx	254 mm 10"	44 mm 1 47/64"	GMP.D08.9L10. xx	254 mm 10"	44 mm 1 47/64"
GMP.D08.BL11. xx	279,4 mm 11"	44 mm 1 47/64"	GMP.D08.BR11. xx	279,4 mm 11"	44 mm 1 47/64"	GMP.D08.9L11. xx	279,4 mm 11"	44 mm 1 47/64"
GMP.D08.BL12. xx	304,8 mm 12"	44 mm 1 47/64"	GMP.D08.BR12. xx	304,8 mm 12"	44 mm 1 47/64"	GMP.D08.9L12. xx	304,8 mm 12"	44 mm 1 47/64"

FISSAGGIO PER PANNELLO IN LEGNO INCLUSO
FIXING FOR WOOD PANEL INCLUDED
MIN 13 mm (1/2") - MAX 21 mm (13/16")

.XX = FINITURA
FINISH
FINITION
AFWERKING
page 181

ACCIAIO INOX STAINLESS STEEL	.44	.43*	
ACCIAIO INOX VERNICIATO STAINLESS STEEL POWDER COATED	.40	.31	.32 .38 .39

.80 STAINLESS STEEL PVD GOLD
SATIN
Black or white burnished steel fixing screws
Minimum order quantity 10 pieces

* Stainless Steel Bright finish has a Satin inner profile

Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.

Genuine leather is a natural material that may exhibit marks, lines, wrinkles, and color variation.



THESE PRODUCTS CONTRIBUTE TO LEED® CREDITS

pba si riserva il diritto di modificare, migliorare e sospendere qualsiasi caratteristica del prodotto (modifiche e miglioramenti nei disegni tecnici e nelle dimensioni) senza preavviso.

The manufacturer reserves the right to alter, improve and discontinue any features of the product (make changes and improvements in designs and dimensions) without notice.

I disegni riportati a catalogo sono indicativi degli ingombri.

Richiedere il disegno tecnico prima di effettuare le lavorazioni per l'installazione.

All dimensions in the catalog drawings are approximations.


Request the appropriate technical drawing before door preparation and installation.



STAINLESS STEEL SATIN AND BLACK LEATHER AS PICTURED



STAINLESS STEEL PVD GOLD SATIN AND BLACK LEATHER AS PICTURED

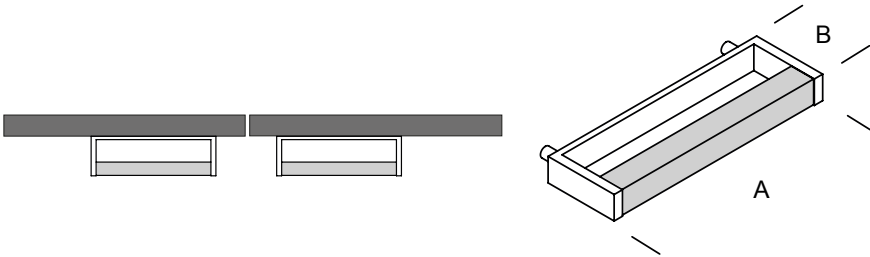

Design 9

LEATHER



Black



Brown



Colors on request - Minimum order quantity 10 pieces

ART.	A	B	ART.	A	B	ART.	A	B
GMP.D09.BL05. xx	127 mm 5"	48 mm 1 57/64"	GMP.D09.BR05. xx	127 mm 5"	48 mm 1 57/64"	GMP.D09.9L05. xx	127 mm 5"	48 mm 1 57/64"
GMP.D09.BL06. xx	152,4 mm 6"	48 mm 1 57/64"	GMP.D09.BR06. xx	152,4 mm 6"	48 mm 1 57/64"	GMP.D09.9L06. xx	152,4 mm 6"	48 mm 1 57/64"
GMP.D09.BL07. xx	177,8 mm 7"	48 mm 1 57/64"	GMP.D09.BR07. xx	177,8 mm 7"	48 mm 1 57/64"	GMP.D09.9L07. xx	177,8 mm 7"	48 mm 1 57/64"
GMP.D09.BL08. xx	203,2 mm 8"	48 mm 1 57/64"	GMP.D09.BR08. xx	203,2 mm 8"	48 mm 1 57/64"	GMP.D09.9L08. xx	203,2 mm 8"	48 mm 1 57/64"
GMP.D09.BL09. xx	228,6 mm 9"	48 mm 1 57/64"	GMP.D09.BR09. xx	228,6 mm 9"	48 mm 1 57/64"	GMP.D09.9L09. xx	228,6 mm 9"	48 mm 1 57/64"
GMP.D09.BL10. xx	254 mm 10"	48 mm 1 57/64"	GMP.D09.BR10. xx	254 mm 10"	48 mm 1 57/64"	GMP.D09.9L10. xx	254 mm 10"	48 mm 1 57/64"
GMP.D09.BL11. xx	279,4 mm 11"	48 mm 1 57/64"	GMP.D09.BR11. xx	279,4 mm 11"	48 mm 1 57/64"	GMP.D09.9L11. xx	279,4 mm 11"	48 mm 1 57/64"
GMP.D09.BL12. xx	304,8 mm 12"	48 mm 1 57/64"	GMP.D09.BR12. xx	304,8 mm 12"	48 mm 1 57/64"	GMP.D09.9L12. xx	304,8 mm 12"	48 mm 1 57/64"

FISSAGGIO PER PANNELLO IN LEGNO INCLUSO
FIXING FOR WOOD PANEL INCLUDED
MIN 16 mm (5/8") - MAX 18mm (11/16")

.XX = FINITURA
FINISH
FINITION
AFWERKING
page 181

ACCIAIO INOX STAINLESS STEEL	.44	.43*	
ACCIAIO INOX VERNICIATO STAINLESS STEEL POWDER COATED	.40	.31	.32 .38 .39

.80 STAINLESS STEEL PVD GOLD
SATIN
Black or white burnished steel fixing screws
Minimum order quantity 10 pieces

* Stainless Steel Bright finish has a Satin inner profile

Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.

Genuine leather is a natural material that may exhibit marks, lines, wrinkles, and color variation.



THESE PRODUCTS CONTRIBUTE TO LEED® CREDITS

pba si riserva il diritto di modificare, migliorare e sospendere qualsiasi caratteristica del prodotto (modifiche e miglioramenti nei disegni tecnici e nelle dimensioni) senza preavviso.

The manufacturer reserves the right to alter, improve and discontinue any features of the product (make changes and improvements in designs and dimensions) without notice.

I disegni riportati a catalogo sono indicativi degli ingombri. Richiedere il disegno tecnico prima di effettuare le lavorazioni per l'installazione.


All dimensions in the catalog drawings are approximations. Request the appropriate technical drawing before door preparation and installation.

MILLWORK AND APPLIANCE PULLS

Stainless Steel AISI 316L
Aluminum
Powder-coated



APPLIANCE PULL

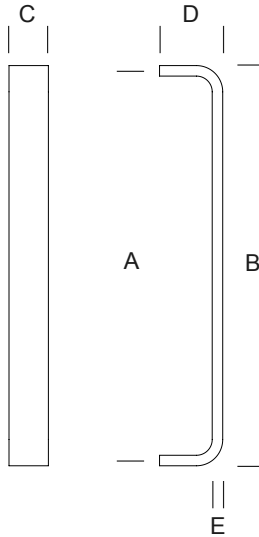

ART.	A	B	C	D	E
2CP.101.0012 .xx	296,80 mm 11 11/16"	304,80 mm 12"	30 mm 1 3/16"	48 mm 1 5/7/64"	8 mm 5/16"
2CP.101.0018 .xx	449,20 mm 17 11/16"	457,20 mm 18"	30 mm 1 3/16"	48 mm 1 5/7/64"	8 mm 5/16"
2CP.101.0024 .xx	601,60 mm 23 11/16"	609,60 mm 24"	30 mm 1 3/16"	48 mm 1 5/7/64"	8 mm 5/16"

FISSAGGIO PER PANNELLO IN LEGNO INCLUSO
FIXING FOR WOOD PANEL INCLUDED
MIN 13 mm (1/2") - MAX 19 mm (3/4")

.XX = FINITURA
FINISH
FINITION
AFWERKING
page 181

ACCIAIO INOX STAINLESS STEEL	.44	.43	
ACCIAIO INOX VERNICIATO STAINLESS STEEL POWDER COATED	.40	.31	.32 .38 .39

Stainless Steel Powder-Coated colors to match any RAL number are available upon request with an MOQ.
(Screws, grub screws, and plastic parts are not powder coated.)

THESE PRODUCTS CONTRIBUTE TO LEED® CREDITS


pba si riserva il diritto di modificare, migliorare e sospendere qualsiasi caratteristica del prodotto (modifiche e miglioramenti nei disegni tecnici e nelle dimensioni) senza preavviso.

The manufacturer reserves the right to alter, improve and discontinue any features of the product (make changes and improvements in designs and dimensions) without notice.


I disegni riportati a catalogo sono indicativi degli ingombri.
Richiedere il disegno tecnico prima di effettuare le lavorazioni per l'installazione.
All dimensions in the catalog drawings are approximations.
Request the appropriate technical drawing before door preparation and installation.



APPLIANCE PULL

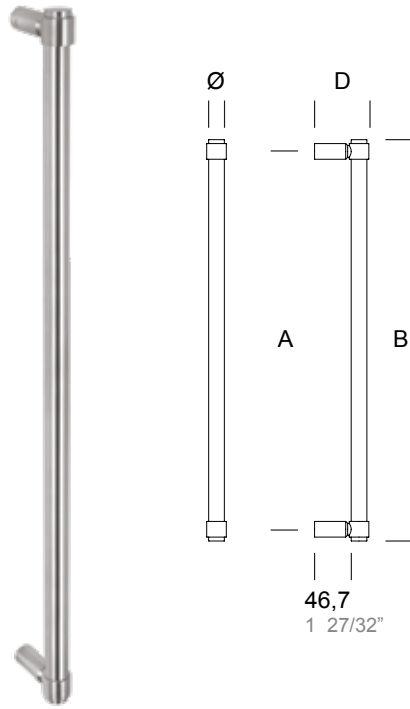

MILLWORK PULL

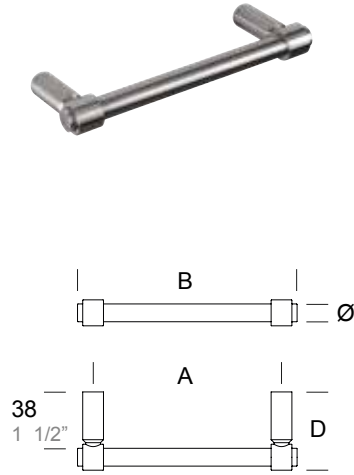

ART.	A	B	Ø	D
GOH.301.0024 .xx	579,6 mm 22 13/16"	609,6 mm 24"	20 mm 25/32"	69 mm 2 23/32"
GOH.301.0030 .xx	732 mm 28 13/16"	762 mm 30"	20 mm 25/32"	69 mm 2 23/32"
GOH.301.0036 .xx	884,4 mm 34 13/16"	914,4 mm 36"	20 mm 25/32"	69 mm 2 23/32"
GOH.301.0048 .xx	1189,2 mm 46 13/16"	1219,2 mm 48"	20 mm 25/32"	69 mm 2 23/32"
GOH.301.9999 .xx	custom	custom	20 mm 25/32"	69 mm 2 23/32"

B MAX 1219,2 mm (48")

FIXING D
page 402

ART.	A	B	Ø	D
GOH.201.0005 .xx	127 mm 5"	148 mm 5 53/64"	12 mm 15/32"	52,75 mm 2 5/64"
GOH.201.0006 .xx	152,4 mm 6"	173,4 mm 6 53/64"	12 mm 15/32"	52,75 mm 2 5/64"
GOH.201.0007 .xx	177,8 mm 7"	198,8 mm 7 53/64"	12 mm 15/32"	52,75 mm 2 5/64"
GOH.201.0008 .xx	203,2 mm 8"	224,2 mm 8 53/64"	12 mm 15/32"	52,75 mm 2 5/64"
GOH.201.0009 .xx	228,6 mm 9"	249,6 mm 9 53/64"	12 mm 15/32"	52,75 mm 2 5/64"
GOH.201.0010 .xx	254 mm 10"	275 mm 10 53/64"	12 mm 15/32"	52,75 mm 2 5/64"
GOH.201.0011 .xx	279,4 mm 11"	300,4 mm 11 53/64"	12 mm 15/32"	52,75 mm 2 5/64"
GOH.201.0012 .xx	304,8 mm 12"	325,8 mm 12 53/64"	12 mm 15/32"	52,75 mm 2 5/64"
GOH.201.0018 .xx	457,2 mm 18"	478,2 mm 18 53/64"	12 mm 15/32"	52,75 mm 2 5/64"

FISSAGGIO PER PANNELLO IN LEGNO INCLUSO
FIXING FOR WOOD PANEL INCLUDED
MIN 18mm (11/16") - MAX 22 mm (17/8")



.XX = FINITURA
FINISH
FINITION
AFWERKING
page 181

ACCIAIO INOX STAINLESS STEEL	.44	.43	
ACCIAIO INOX VERNICIATO STAINLESS STEEL POWDER COATED	.40	.31	.32 .38 .39


Stainless Steel Powder-Coated colors to match any RAL number are available upon request with an MOQ.
(Screws, grub screws, and plastic parts are not powder coated.)

THESE PRODUCTS CONTRIBUTE TO LEED® CREDITS

THE MANUFACTURER RESERVES THE RIGHT TO ALTER, IMPROVE AND DISCONTINUE ANY FEATURES OF THE PRODUCT (MAKE CHANGES AND IMPROVEMENTS IN DESIGNS AND DIMENSIONS) WITHOUT NOTICE.

ALL DIMENSIONS IN THE CATALOG DRAWINGS ARE APPROXIMATIONS. REQUEST THE APPROPRIATE TECHNICAL DRAWING BEFORE DOOR PREPARATION AND INSTALLATION.

MILLWORK PULL / APPLIANCE PULL



ART.	A	B	Ø	D
2AT.003.0022 .xx	224 mm 8 13/16"	254 mm 10"	20 mm 25/32"	45,40 mm 1 25/32"
2AT.003.0027 .xx	274,80 mm 10 13/16"	304,80 mm 12"	20 mm 25/32"	45,40 mm 1 25/32"
2AT.003.0043 .xx	427,20 mm 16 13/16"	457,20 mm 18"	20 mm 25/32"	45,40 mm 1 25/32"
2AT.003.0048 .xx	478 mm 18 13/16"	508 mm 20"	20 mm 25/32"	45,40 mm 1 25/32"
2AT.003.0058 .xx	579,60 mm 22 13/16"	609,60 mm 24"	20 mm 25/32"	45,40 mm 1 25/32"
2AT.003.0073 .xx	732 mm 28 13/16"	762 mm 30"	20 mm 25/32"	45,40 mm 1 25/32"
2AT.003.0088 .xx	884,40 mm 34 13/16"	914,40 mm 36"	20 mm 25/32"	45,40 mm 1 25/32"
2AT.003.9999 .xx	custom	custom	20 mm 25/32"	45,40 mm 1 25/32"

Max lenght 36" - 914,40 mm

Custom size available with minimum order quantity

FISSAGGIO PER PANNELLO IN LEGNO INCLUSO
FIXING FOR WOOD PANEL INCLUDED
MIN 13 mm (1/2") - MAX 19 mm (3/4")



.XX = FINITURA
FINISH
FINITION
AFWERKING
page 181


ALLUMINIO SATINATO ANODIZZATO
SATIN ANODIZED ALUMINIUM



CUSTOM ANODIZED POLISHED FINISH NOT AVAILABLE.
OTHER CUSTOM FINISH FEASIBILITY TO BE VALIDATED BEFORE ORDER.

THESE MODELS SHALL NOT BE USED AS DOOR PULLS.
ONLY FOR USE ON APPLIANCE DOORS OR CABINET DOORS

MILLWORK PULL



ART.	A	B	Ø	D
2AT.004.0019 .xx	188,20 mm 7 13/32"	203,20 mm 8"	10 mm 25/64"	35,40 mm 1 25/64"
2AT.004.0029 .xx	289,80 mm 11 13/32"	304,80 mm 12"	10 mm 25/64"	35,40 mm 1 25/64"
2AT.004.0044 .xx	442,20 mm 17 13/32"	457,20 mm 18"	10 mm 25/64"	35,40 mm 1 25/64"

Max lenght 18" - 457,20 mm

Custom size available with minimum order quantity

FISSAGGIO PER PANNELLO IN LEGNO INCLUSO
FIXING FOR WOOD PANEL INCLUDED
(MIN 1/2" - MAX 3/4")



DIFFERENCES IN THE FINISHING OF (DIFFERENT) COMPONENTS ARE DUE TO THE DIFFERENT PRODUCTION METHODS. THESE VARIATIONS ARE NOT CONSIDERED DEFECTS AND ARE A NATURAL RESULT OF THE FINISHING PROCESS.

THESE PRODUCTS CONTRIBUTE TO LEED® CREDITS

pba si riserva il diritto di modificare, migliorare e sospendere qualsiasi caratteristica del prodotto (modifiche e miglioramenti nei disegni tecnici e nelle dimensioni) senza preavviso.

The manufacturer reserves the right to alter, improve and discontinue any features of the product (make changes and improvements in designs and dimensions) without notice.

I disegni riportati a catalogo sono indicativi degli ingombri.
Richiedere il disegno tecnico prima di effettuare le lavorazioni per l'installazione.

All dimensions in the catalog drawings are approximations.
Request the appropriate technical drawing before door preparation and installation.

TECHNICAL INFORMATION

PBA ANTIMICROBIAL COATING (AMC)



THE USE OF PRODUCTS WITH ANTIMICROBIAL SURFACES IS BECOMING A MORE IMPORTANT WAY TO CREATE CLEANER, MORE HYGIENIC ENVIRONMENTS WITH REDUCED OPPORTUNITIES FOR THE PROLIFERATION AND TRANSMISSION OF GERMS. THE **PBA ANTIMICROBIAL COATING (AMC)** SURFACE FINISH IS A VALID ANSWER TO THIS BINDING NEED.



THE **PBA ANTIMICROBIAL COATING (AMC)** SURFACE FINISHING CONTAINS SPECIAL ADDITIVES THAT MAKE THE SURFACE PROTECTED FROM BACTERIA AND MICROORGANISMS. THE TESTS SHOW THAT ON UNTREATED SURFACES THE MICROBES AND BACTERIA CAN EASILY PROLIFERATE WHILE ON THE TREATED SURFACES THE BACTERIAL PROLIFERATION IS PRACTICALLY ZEROED.


THE FOUNDATION FOR SUCCESSFULLY FIGHTING GERM GROWTH CONSISTS OF A THREE ACTION MECHANISMS: BLOCKAGE OF PRIMARY CELL METABOLISM, STOPPAGE OF CELLULAR RESPIRATION, PREVENTION OF CELL DIVISION.

SURFACES WITH **PBA ANTIMICROBIAL COATING (AMC)** HAVE BEEN TESTED TO BE ACTIVE AGAINST GRAM-POSITIVE (STAPHYLOCOCCUS AUREUS - MRSA, BACILLUS SUBTILIS, STREPTOCOCCUS DAECALIS, AND OTHERS) AND GRAM-NEGATIVE BACTERIA (ESCHERICHIA COLI - ESBL, LEGIONELLA PNEUMOPHILA, PSEUDOMONAS AERUGINOSA AND OTHERS).

TRIED AND TESTED EFFICACY DEMONSTRATES THAT **PBA ANTIMICROBIAL COATING (AMC)** REDUCES MULTI-RESISTANT GERMS BY 99.99%.

PBA ANTIMICROBIAL COATING (AMC) IS RECOMMENDED FOR ALL THE HYGENE-SENSITIVE AREAS SUCH AS HOSPITALS AND RETIREMENT HOME, OFFICES AND RETAIL AND GENERALLY FOR PUBLIC BUILDINGS AND HOTELS.

ALL PBA PRODUCTS IN STAINLESS STEEL AND ALUMINUM CAN BE TREATED WITH **PBA ANTIMICROBIAL COATING (AMC)**.

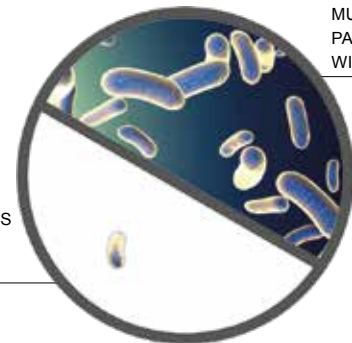


MULTI-RESISTANT PATHOGENS DEVELOP WITHOUT PBA AMC

PBA AMC REDUCES PATHOGENS BY 99.99%


TRIED AND TESTED EFFICACY REDUCES MULTI-RESISTANT PATHOGENS BY 99.99%. (EFFECT OF ANTI-BACTERIAL ACTIVITY ON STAINLESS STEEL SURFACES.)

AVAILABLE SIZES FOR EACH MODEL


Design 1




Design 2




Design 2R




Design 3




Design 3R




Design 5




Design 6




Design 7*



Design 8



Design 9



SIZES

304,8 mm
12 in



279,4 mm
11 in



254 mm
10 in



228,6 mm
9 in



203,2 mm
8 in



177,8 mm
7 in



152,4 mm
6 in



127 mm
5 in



* Not available 10 in, 11 in, 12 in sizes

Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.

