
This product contributes to LEED® credit


Red List Free Declare.

ITEM

GBA.104.0000. xx


PAPER TOWEL DISPENSER - SURFACE MOUNTED

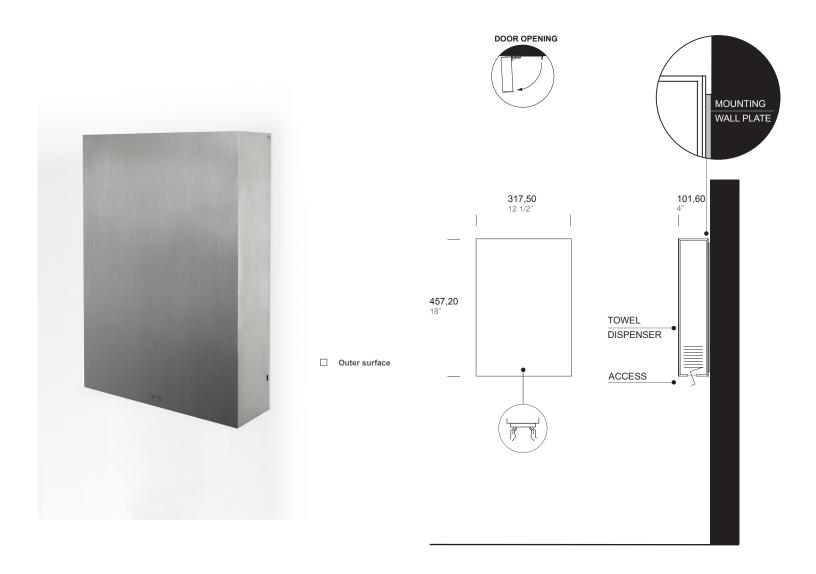



For more information on compliant location see project guide page 137.

.XX STANDARD COMBINATION FINISHES OUTER SURFACE AND MOUNTING WALL PLATE

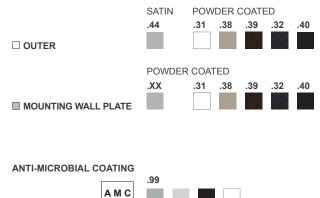



DESIGN FOR ALL BATHROOM ACCESSORIES

This product contributes to LEED® credit



SPECIFICATION:

Paper towel dispenser for surface mounted installation with overall dimensions 18" (H) x 12-1/2" (W) and 4" total projection from wall. Mounting wall plate in 5/32" (4 mm) thick type 316L stainless steel with powder coated finish.

Front door with beautiful non-rounded design made with 1/16" (1,5 mm) and 5/64" (2 mm) thick type 316L stainless steel welded-per-point with integrated paper towel dispenser which shall dispense up to 600 C-fold or multifold (Z-fold) paper towels.

Fits standard size paper towels up to a maximum of 10-15/64" (260 mm) x 3-55/64" (98 mm).

Reinforced structure with full height square 19/32" (15 mm) type 316L stainless steel tube. Exposed surfaces of front door have satin finish. Integrated hinge system to allow the door opening with a minimum gap from the wall (thickness of mounting wall frame).

Unit equipped with a slider door-opening limiter and a concealed closure system which keeps the door closed (not locked). Rectangular hole on side allows access to open the unit with the key grey RAL 9007 powder coated included.

OPFRATION

Maintenance - Use provided key from side hole to open the front door to have access to recessed unit. The sliding door-opening limiter prevents the door for extra-overture which may cause damages to the wall / tiles. Place recharge of paper towel packs through the opening of the dispenser located on the back side of the door.

User - Paper towel dispenser will dispense up to 600 C-fold or multifold (Z-fold) paper towels from the front opening window. Fits standard size paper towels up to a maximum of 10-15/64" (260 mm) x 3-55/64" (98 mm).

INSTALLATION:

Use wall plate as template to mark holes in desired mounting location. For plaster or dry wall construction, provide concealed backing to comply with local building codes, then secure using provided fixing screws. For concrete wall or other wall surfaces use provided fixing screws and plugs.

NOTE:

On the satin finish, possible differences in the brushing are the result of the manufacturing process and must be considered acceptable. Minimal welding discontinuities must be considered acceptable.

