
see Technical Data Sheet for load capacity



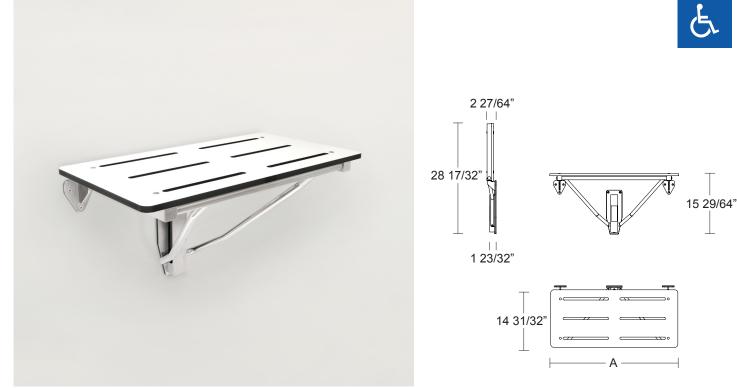

ITEM	Α
4CS.447.UR01 . xx	21"
4CS.447.UR02 . xx	27"
4CS.447.UR03 . xx	33"

FOI DING	SHOWER	SEAT
FULDING	SHOWER	SEAL

Seat 1/2" (13 mm) thick solid high pressure laminated (HPL) with slots for water drainage, connected to frame with type-316 stainless steel bolts.


Frame type-316L satin finish stainless steel 1-1/4" (30 mm) square tube connected with 25/32" (20 mm) diameter tube. Mounting flanges and Guide Bracket in type-316L satin finish stainless steel 15/64" (6 mm) thick with fully recyclable polyamide-6 wall protection. 9 screw holes for attachment to wall. Adjustable frictioning system.

MOUNTING KITS not included.

Optional mounting kit for concrete, natural stone, solid brick and hollow brick: KIT 4CN.0VM.0042.00. Optional mounting kit for sheetrock wall and wooden plate: KIT 4CN.0VM.0043.00.

SUSTAINABILITY


This product contributes to LEED® credit

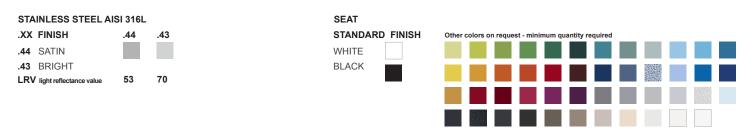

HPL SEAT PANEL FOR 316L STAINLESS STEEL 4CS SEAT

HPL is a high-pressure decorative laminate, in other words a panel consisting of layers of cellulose fibres that are impregnated with thermosetting resins and subjected to a high pressure process consisting in the simultaneous application of heat and pressure. This causes at the same time the fluidization and polycondensation of the resins, resulting in a homogeneous, non-porous material with the required surface finish. HPL is supplied as panels, available in different sizes, thicknesses and surface finishes.

STANDARD COLORS



White Megeve

Black

AVAILABLE COLORS (minimum quantity requested)



Emerald Mousse Celadon Big Blue Turquoise Batik Blue Velvet Blue Thistle Indigo Zest Oslo Blue Flash Blue Caribbean Blue Ash Gray Pearl Gray Paloma Gray Dove Gray Cocco Zest Blue Mist Natural Beige Storm Gray Mink Gray Caviar Moon Stone Nutmeg

AVAILABLE COLORS (minimum quantity requested)

Egg Shell

Orgeat

White Menuires