



This product contributes to LEED® credit



ITEM



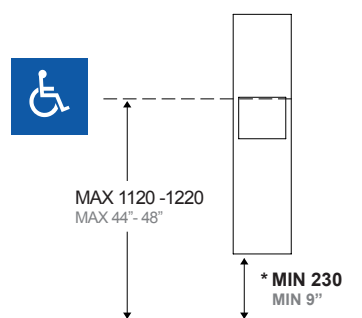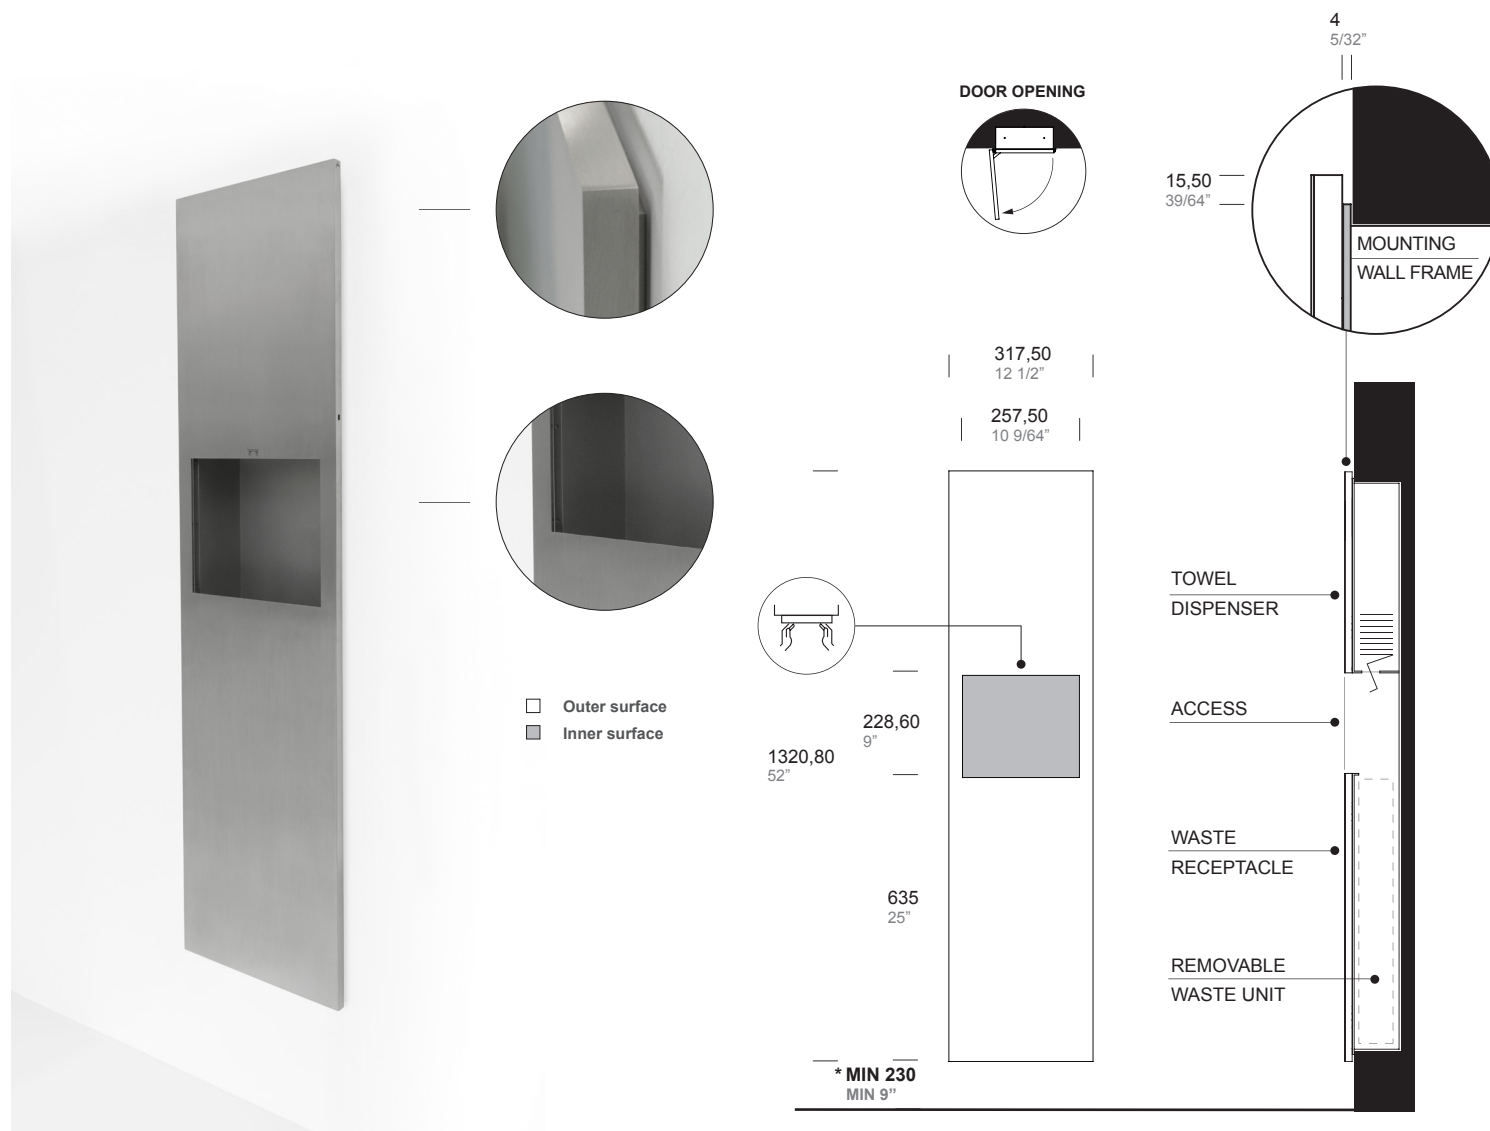









GBA.101.0000. xx
GBA.101.00WR.00

COMBINATION PAPER TOWEL DISPENSER / WASTE UNIT SMALL - RECESSED
REMOVABLE WASTE RECEPTACLE - NOT INCLUDED




WALL OPENING
Height: 50 1/8" (1273 mm)
Width: 10 5/8" (270 mm)
Depth: 4 1/4" (108 mm)

.XX STANDARD COMBINATION FINISHES OUTER AND INNER SURFACE

		SATIN	POWDER COATED				
		.44	.31	.38	.39	.32	.40
<input type="checkbox"/> OUTER							
			POWDER COATED				
		.XX	.31	.38	.39	.32	.40
<input type="checkbox"/> INNER AND MOUNTING WALL FRAME							

INNER SURFACE FINISH OPTIONS ON REQUEST *
* minimum order quantity

ANTI-MICROBIAL COATING



For more information on compliant location see project guide page 137.

The manufacturer reserves the right to alter, improve and discontinue any features of the product [make changes and improvements in designs and dimensions] without notice.



GBA.101.0000

SPECIFICATION:

Combination of paper towel dispenser and waste unit for recessed installation with overall dimensions 52" (H) x 12-1/2" (W) and 53/64" total projection from wall.

Mounting wall frame in 5/32" (4 mm) thick welded on a all-welded construction in 3/64" (1 mm) thick type 316L stainless steel with powder coated finish. Integrated paper towel dispenser which shall dispense up to 600 C-fold or multifold (Z-fold) paper towels.

Fits standard size paper towels up to a maximum of 10-15/64" (260 mm) x 3-55/64" (98 mm).

Front door with beautiful non-rounded design made with 1/16" (1,5 mm) and 5/64" (2 mm) thick type 316L stainless steel welded-per-point. Reinforced structure with full height square 19/32" (15 mm) type 316L stainless steel tube. Exposed surfaces of front door have satin finish.

Integrated hinge system to allow the door opening with a minimum gap from the wall (thickness of mounting wall frame).

Unit equipped with a slider door-opening limiter and a concealed closure system which keeps the door closed (not locked). Rectangular hole on side allows access to open the unit with provided key.

Removable leakproof molded waste receptacle in 5/64" (2 mm) black PST (polystyrene) to be ordered separately with a capacity of 4,11 US gal (15,6 L). Waste receptacle shall be model GBA.101.00WR.00. One key grey RAL 9007 powder coated included.

OPERATION:

Maintenance - Use provided key from side hole to open the front door to have access to recessed unit. The sliding door-opening limiter prevents the door for extra-overture which may cause damages to the wall / tiles. Place recharge of paper towel packs through the front opening of the dispenser.

The leakproof waste receptacle is removable for servicing: lift slightly and pull forward to remove it from the unit.

User - Paper towel dispenser will dispense up to 600 C-fold or multifold (Z-fold) paper towels from the front opening window.

Fits standard size paper towels up to a maximum of 10-15/64" (260 mm) x 3-55/64" (98 mm).

INSTALLATION:

Provide framed rough wall opening 50-1/8" height x 10-5/8" width (1273 x 270 mm). Suggested depth to finish face of wall is 4-1/4" (108 mm); minimum recessed depth required is 4".

Allow clearance for construction features that may protrude into rough wall opening from opposite wall and avoid pipes, vents and conduits.

Mount unit into wall opening and secure with provided fixing screws in 4 mounting holes on the recessed cabinet.

GBA.101.00WR.00

SPECIFICATION:

Removable leakproof molded waste receptacle in 5/64" (2 mm) black PST (polystyrene) with a capacity of 4,11 US gal (15,6 L) suitable for item GBA.101.0000.


Dimensions 23-1/8" (H) x 10-3/64" (W) x 4-17/32" (D) x 4-17/32".

OPERATION:

The leakproof waste receptacle is removable for servicing: lift slightly and pull forward to remove it from the unit.

NOTE:

On the satin finish, possible differences in the brushing are the result of the manufacturing process and must be considered acceptable. Minimal welding discontinuities must be considered acceptable.

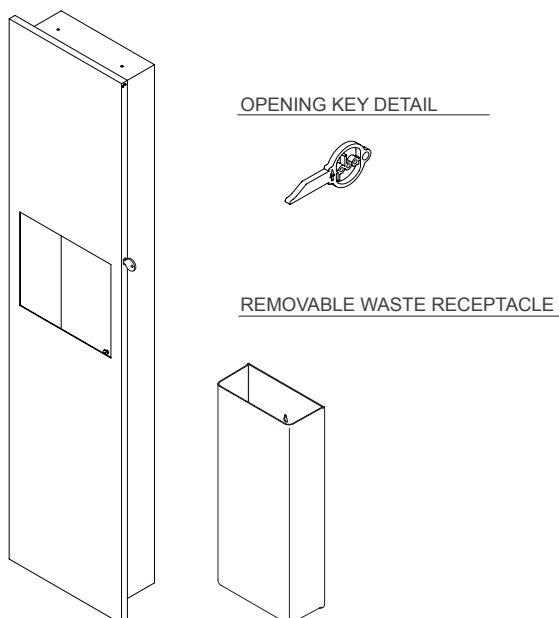

KEY INCLUDED

ITEM

GBA.100.0KEY.99

REMOVABLE WASTE RECEPTACLE NOT INCLUDED

ITEM

GBA.101.00WR.00